


# Attenuator, DC~3GHz, N 1000Watt 40dB, Uni-directional

P.N. : A-0340.NNM0.S

## Dimension

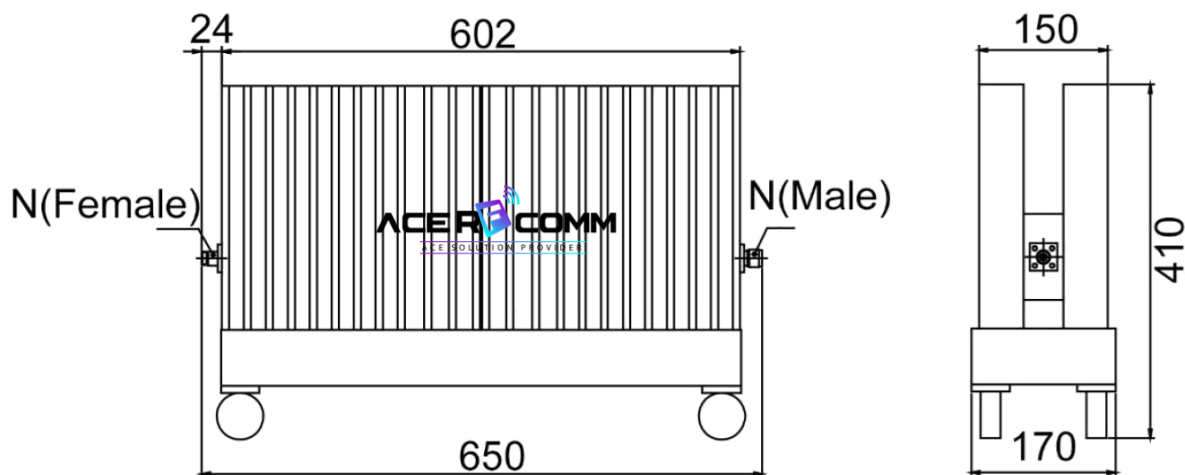

## Electrical & Environmental specification

Frequency Range	DC ~ 3GHz
Impedance	50 Ohm
Input Ave Power	1000Watt @ 25°C derated linearly to 200 watts @ 100°C
Peak Power	10kW ( 5 μsec pulse width, 10% duty cycle)
Nominal Attenuation	40dB ±2.2dB
V.S.W.R.	1.45 : 1 Max
Direction	N male input to N female output
Operating Temperature	-55°C ~ 100 °C


## Material specification

Connector Body	Nickel Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Black Anodizing, Aluminum
Weight	30 Kg
Dimension	650 * 410 * 170mm
RoHS	Complaint

# Attenuator, DC~3GHz, N 1000Watt 40dB, Uni-directional

P.N. : A-0340.NNM0.S

## Test Data

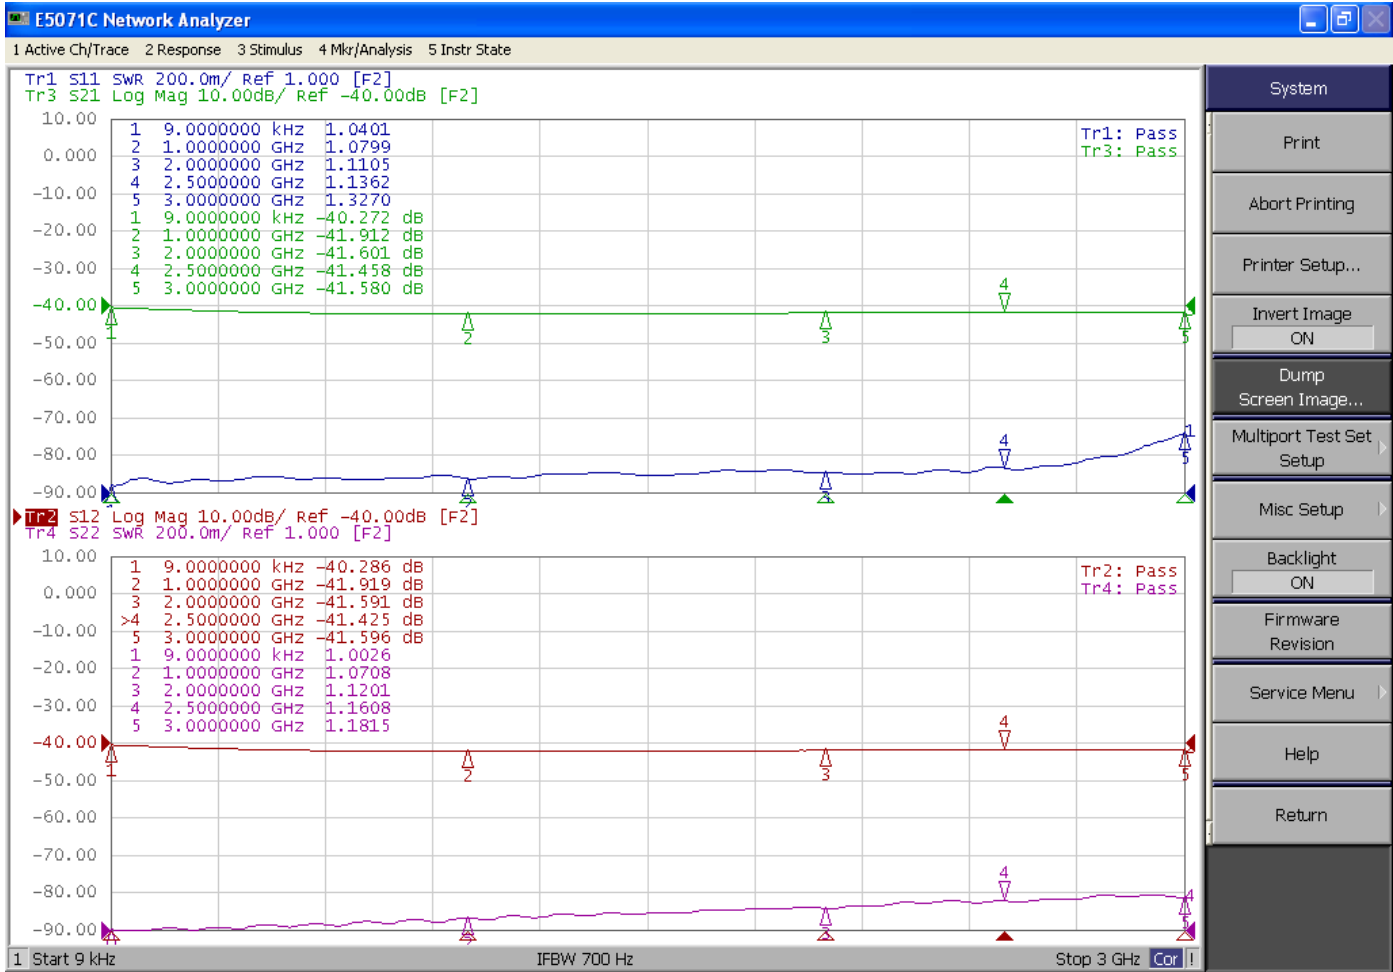

System

- Print
- Abort Printing
- Printer Setup...
- Invert Image ON
- Dump Screen Image...
- Multiport Test Set Setup
- Misc Setup
- Backlight ON
- Firmware Revision
- Service Menu
- Help
- Return

# Attenuator, DC~3GHz, N 1000Watt 40dB, Uni-directional

P.N. : A-0340.NNM0.S

## Product Photos



# Attenuator, DC~3GHz, N 1000Watt 40dB, Uni-directional

P.N. : A-0340.NNM0.S

## Product Photos

