


Attenuator, DC~3GHz, 2000Watt 50dB, 7/16(F) to N(F)

P.N. : A-0350.71N0.S

Photo



Dimension

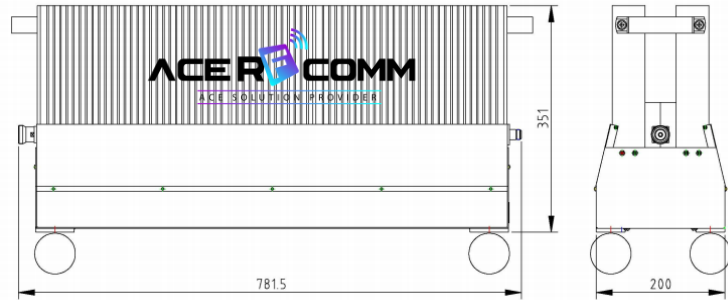

Electrical & Environmental specification

Frequency Range	DC ~ 3GHz
Impedance	50 Ohm
Input Ave Power	2000Watt @ 25°C derated linearly to 300 watts @ 125°C
Peak Power	10kW (5 µsec pulse width, 5% duty cycle)
Nominal Attenuation	50dB ±3.5dB
V.S.W.R.	1.45 : 1 Max
Direction	7/16 DIN Female input to N Female output
Operating Temperature	-55°C ~ 100 °C

Material specification

Connector Body	Nickel Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Black Anodizing, Aluminum
Weight	37 Kg
Dimension	650 * 410 * 170mm
RoHS	Complaint