


# Attenuator, DC~3GHz, N 1000Watt 50dB, Uni-directional

P.N. : A-0350.NNM0.S

## Dimension

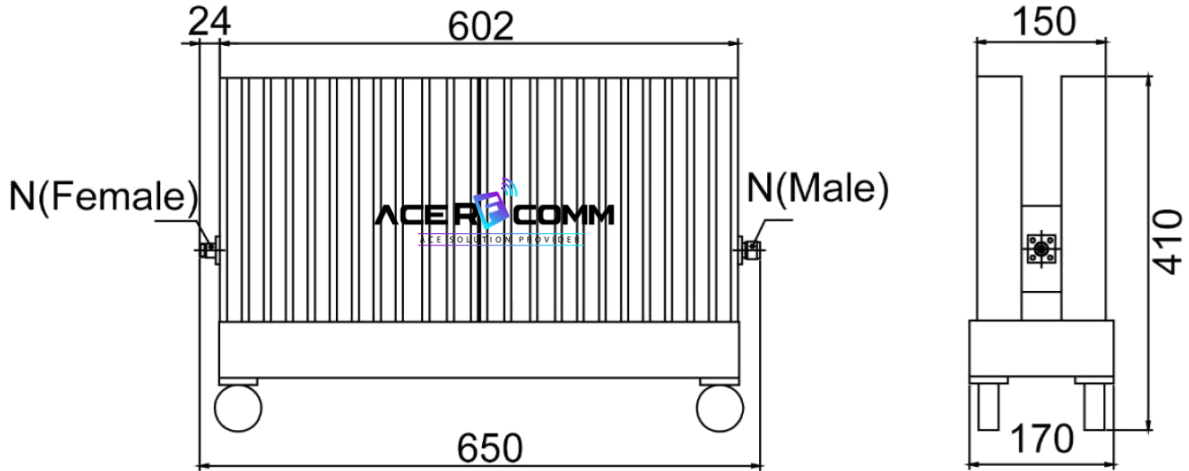

## Electrical & Environmental specification

Frequency Range	DC ~ 3GHz
Impedance	50 Ohm
Input Ave Power	1000Watt @ 25°C derated linearly to 200 watts @ 100°C
Peak Power	10kW ( 5 µsec pulse width, 10% duty cycle)
Nominal Attenuation	50dB ±2.2dB
V.S.W.R.	1.45 : 1 Max
Direction	N male input to N female output
Operating Temperature	-55°C ~ 100 °C

## Material specification

Connector Body	Nickel Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Black Anodizing, Aluminum
Weight	30 Kg
Dimension	650 * 410 * 170mm
RoHS	Complaint

# Attenuator, DC~3GHz, N 1000Watt 50dB, Uni-directional

P.N. : A-0350.NNM0.S

## Test Data



# Attenuator, DC~3GHz, N 1000Watt 50dB, Uni-directional

P.N. : A-0350.NNM0.S

## Product Photos



# Attenuator, DC~3GHz, N 1000Watt 50dB, Uni-directional

P.N. : A-0350.NNM0.S

## Product Photos

