


Attenuator, DC~4GHz, N 100Watt 6dB, Uni-directional

P.N. : A-0406.NNH0.R

Dimension

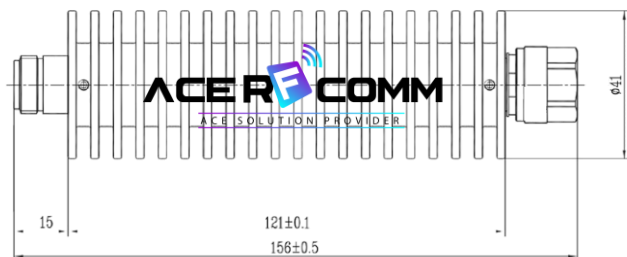

Photo



Electrical & Environmental specification

Frequency Range	DC ~ 4GHz
Impedance	50 Ohm
Input Ave Power	100Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	5kW (5 µsec pulse width, 1% duty cycle)
Nominal Attenuation	6dB ± 0.7dB
V.S.W.R.	1.25 : 1 Max
Direction	N male input to N female output
Operating Temperature	-55°C ~ 125 °C

Material specification

Connector Body	Tri-Alloy Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Black Anodizing, Aluminum
Weight	350 gram
Dimension	Ø41 * 156mm
RoHS	Complaint

Attenuator, DC~4GHz, N 100Watt 6dB, Uni-directional

P.N. : A-0406.NNH0.R

Test Data

10/26/2022 4:26:31 PM
1311.6010K64-102774-Fw

