


Attenuator, DC~4GHz, N(f,f) 30Watt 20dB, Uni-directional

P.N. : A-0420.NN30.2

Dimension

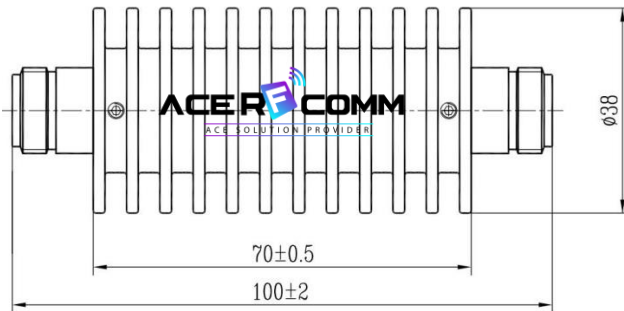

Electrical & Environmental specification

Frequency Range	DC ~ 4GHz
Impedance	50 Ohm
Input Ave Power	30Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	1kW (5 µsec pulse width, 1% duty cycle)
Nominal Attenuation	20dB ± 0.6dB
V.S.W.R.	1.25 : 1 Max
Direction	N female input to N female output
Operating Temperature	-55°C ~ 125 °C

Material specification

Connector Body	Tri-Alloy Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Black Anodizing, Aluminum
Weight	165 gram
Dimension	Ø38 * 100mm
RoHS	Complaint

Attenuator, DC~4GHz, N(f,f) 30Watt 20dB, Uni-directional

P.N. : A-0420.NN30.2

Test Data

