


Attenuator, DC~4GHz, N 100Watt 20dB, Bi-directional

P.N. : A-0420.NNH0.B

Dimension

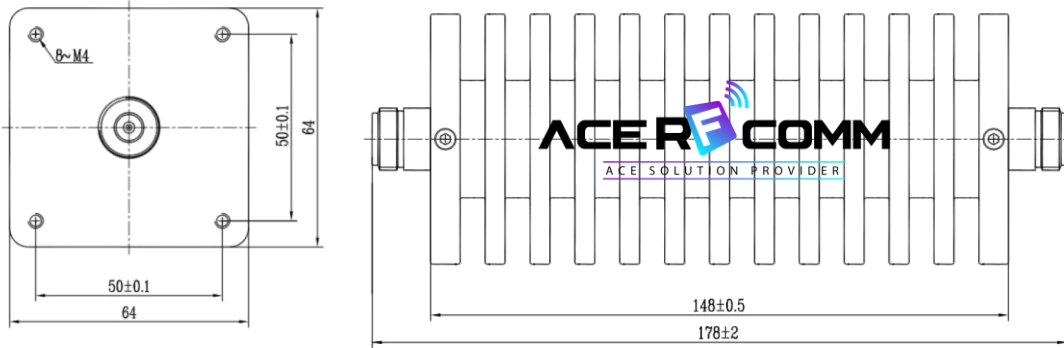

Electrical & Environmental specification

Frequency Range	DC ~ 4GHz
Impedance	50 Ohm
Input Ave Power	100Watt @ 25°C derated linearly to 10 watts @ 100°C
Peak Power	5kW (5 μsec pulse width, 0.5% duty cycle)
Nominal Attenuation	20dB ± 0.8dB
V.S.W.R.	1.25 : 1 Max
Direction	N female to N female
Operating Temperature	-55°C ~ 125 °C


Material specification

Connector Body	Tri-Alloy Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Black Anodizing, Aluminum
Weight	970 gram
Dimension	64 * 64 * 178mm
RoHS	Complaint

Attenuator, DC~4GHz, N 100Watt 20dB, Bi-directional

P.N. : A-0420.NNH0.B

Test Data

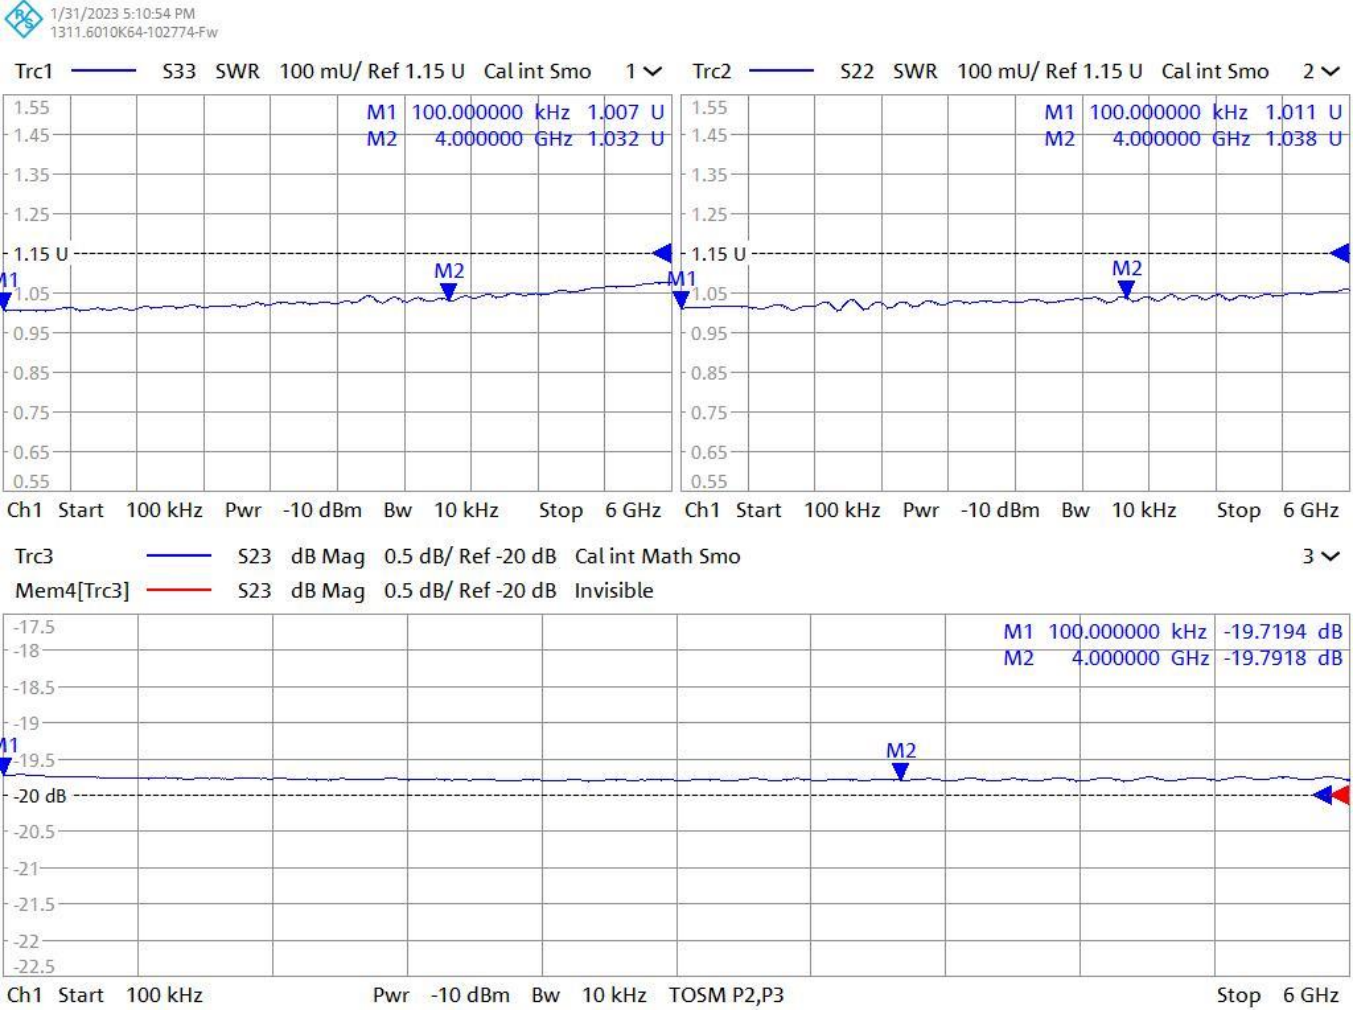

Photo

