


# Attenuator, DC~4GHz, N 100Watt 40dB, Uni-directional

P.N. : A-0440.NNH0.4

## Dimension

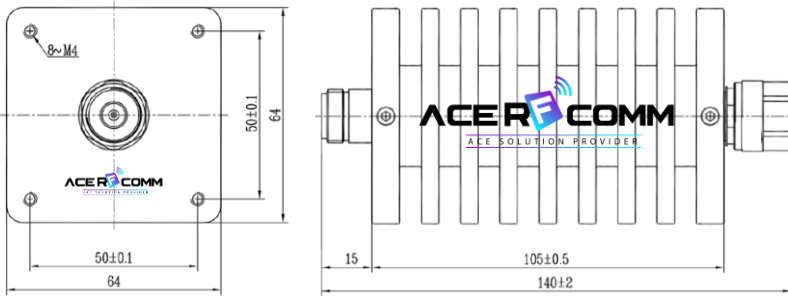

## Photo



## Electrical & Environmental specification

Frequency Range	DC ~ 4GHz
Impedance	50 Ohm
Input Ave Power	100Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	5kW ( 5 μsec pulse width, 1% duty cycle)
Nominal Attenuation	40dB ± 0.9dB
V.S.W.R.	1.25 : 1 Max
Direction	N male input to N female output
Operating Temperature	-55°C ~ 125 °C

## Material specification

Connector Body	Tri-Alloy Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Black Anodizing, Aluminum
Weight	720 gram
Dimension	64 * 64 * 140mm
RoHS	Complaint

# Attenuator, DC~4GHz, N 100Watt 40dB, Uni-directional

P.N. : A-0440.NNH0.4

## Electrical Test Data

