


Attenuator, DC~6GHz, 4.3/10(M) * N(F) 100Watt 30dB, Uni-directional

P.N. : A-0630.4NH0.S

Dimension

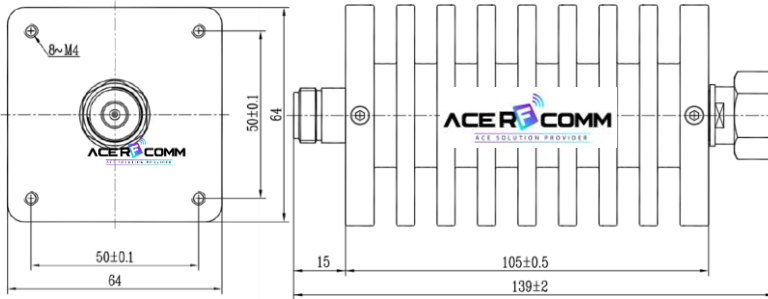

Photo



Electrical & Environmental specification

Frequency Range	DC ~ 6GHz
Impedance	50 Ohm
Input Ave Power	100Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	5kW (5 µsec pulse width, 1% duty cycle)
Nominal Attenuation	30dB ± 1.1dB
V.S.W.R.	1.30 : 1 Max
Direction	4.3/10 DIN male input to N female output
Operating Temperature	-55°C ~ 125 °C

Material specification

Connector Body	Tri-Alloy Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Black Anodizing, Aluminum
Weight	726 gram
Dimension	64 * 64 * 140mm
RoHS	Complaint