


Attenuator, DC~8.5GHz, N 300Watt 30dB, Uni-directional

P.N. : A-0830.NNJ0.S

Dimension

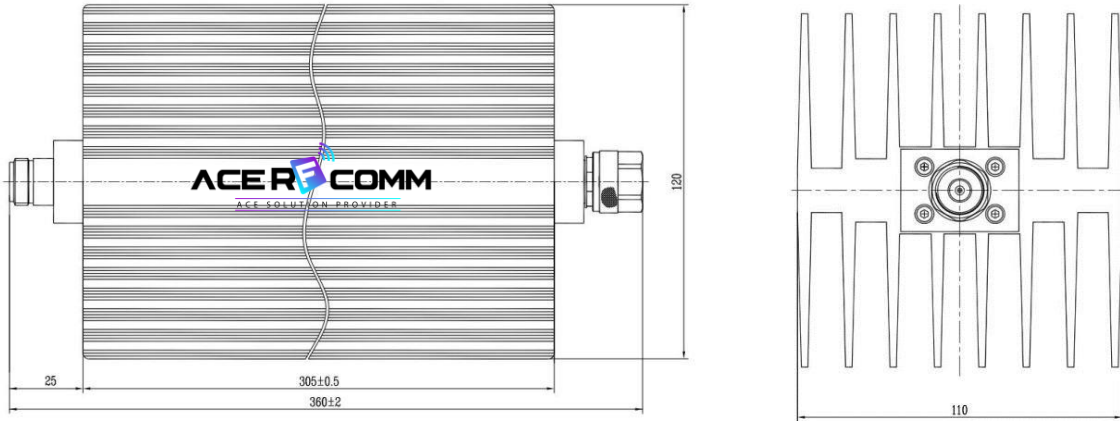

Photo



Electrical & Environmental specification

Frequency Range	DC ~ 8.5GHz
Impedance	50 Ohm
Input Ave Power	300Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	3kW (5 µsec pulse width, 1% duty cycle)
Nominal Attenuation	30dB ± 1.1dB
V.S.W.R.	1.30 : 1 Max
Direction	N male input to N female output
Operating Temperature	-55°C ~ 125 °C

Material specification

Connector Body	Tri-Alloy Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Black Anodizing, Aluminum
Weight	4.26 Kg
Dimension	110 * 120 * 305mm
RoHS	Complaint

Test Data

