


Attenuator, DC~12GHz, N 30Watt 10dB, Uni-directional

P.N. : A-1210.NN30.1

Dimension

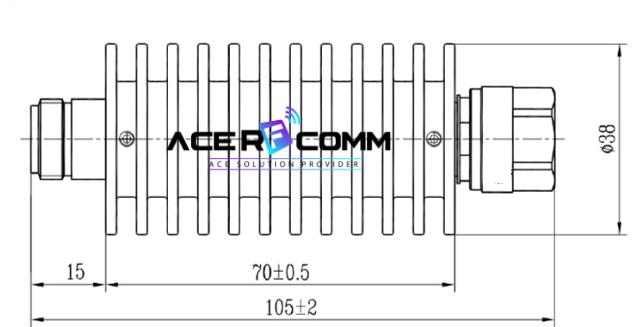

Photo



Electrical & Environmental specification

Frequency Range	DC ~ 12GHz
Impedance	50 Ohm
Input Ave Power	30Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	1kW (5 µsec pulse width, 1% duty cycle)
Nominal Attenuation	10dB ± 0.7dB
V.S.W.R.	1.37 : 1 Max
Direction	N male input to N female output
Operating Temperature	-55°C ~ 125 °C

Material specification

Connector Body	Tri-Alloy Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Black Anodizing, Aluminum
Weight	165 gram
Dimension	Ø38 * 105mm
RoHS	Complaint