


# Attenuator, DC~18GHz, SMA 25Watt 20dB, Bi-directional

P.N. : A-1820.SM25.1

**Dimension**

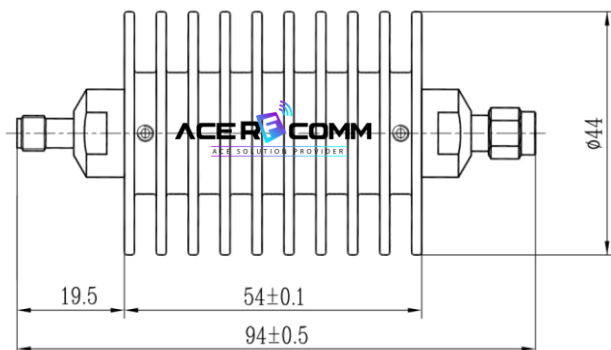

**Photo/3D Image**



## Electrical & Environmental specification

Frequency Range	DC ~ 18GHz
Impedance	50 Ohm
Input Ave Power	25Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	1kW ( 5 µsec pulse width, 1% duty cycle)
Nominal Attenuation	20dB ± 1.1dB
V.S.W.R.	1.50 : 1 Max
Direction	SMA male to SMA female
Operating Temperature	-55°C ~ 125 °C

## Material specification

Connector Body	Tri-Alloy Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Black Anodizing, Aluminum
Weight	155 gram
Dimension	Ø44 * 94mm
RoHS	Complaint

# Attenuator, DC~18GHz, SMA 25Watt 20dB, Bi-directional

P.N. : A-1820.SM25.1

## Test Data

