


# Attenuator, DC~18GHz, N(f,f) 200Watt 40dB, Uni-directional

P.N. : A-1840.NN10.B

## Dimension

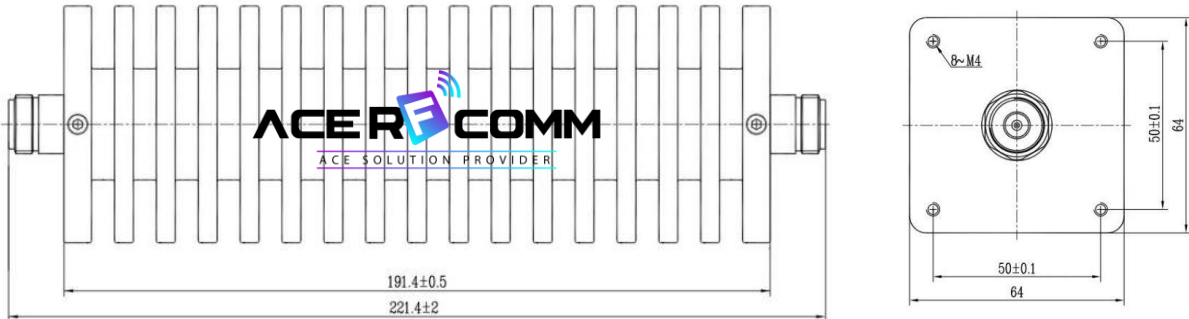

## Photo



## Electrical & Environmental specification

Frequency Range	DC ~ 18GHz
Impedance	50 Ohm
Input Ave Power	200Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	10kW ( 5 $\mu$ sec pulse width, 1% duty cycle)
Nominal Attenuation	40dB $\pm$ 1.5dB
V.S.W.R.	1.50 : 1 Max
Direction	N female input to N female output
Operating Temperature	-55°C ~ 125 °C

### Material specification

Connector Body	Tri-Alloy Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Black Anodizing, Aluminum
Weight	1.23 Kg
Dimension	64 * 64 * 221mm
RoHS	Complaint

### Test Data

