


# Attenuator, DC~18GHz, N 250Watt 40dB, Uni-directional

P.N. : A-1840.NNI5.1

## Dimension

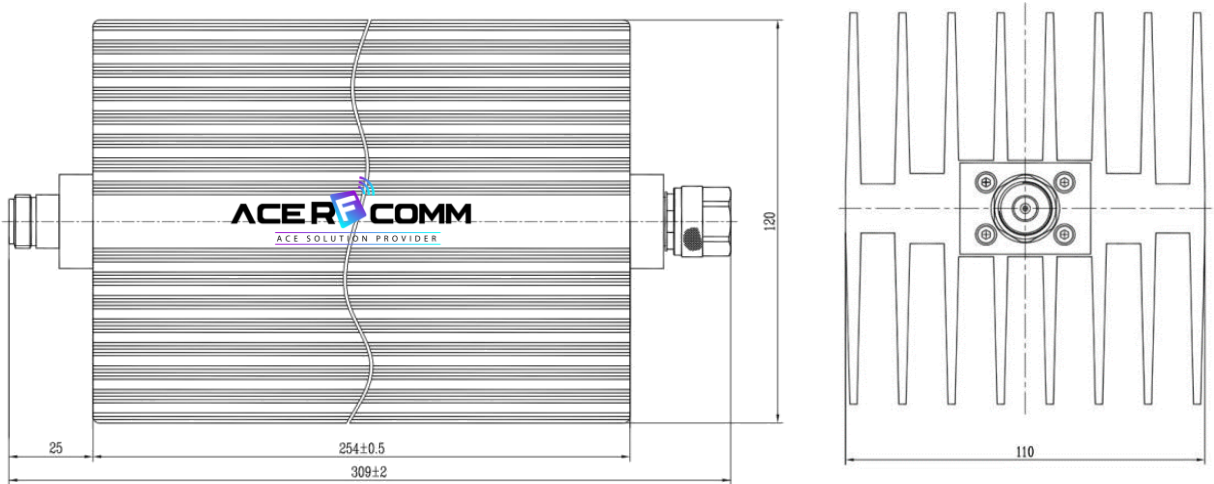

## Electrical & Environmental specification

Frequency Range	DC ~ 18GHz
Impedance	50 Ohm
Input Ave Power	250Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	2.5kW ( 5 μsec pulse width, 5% duty cycle)
Nominal Attenuation	40dB ±1.5dB
V.S.W.R.	1.50 : 1 Max
Direction	N male input, N female output
Operating Temperature	-55°C ~ 125 °C

## Material specification

Connector Body	Tri-Alloy Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Black Anodizing, Aluminum
Weight	3.6 Kg
Dimension	110 * 120 * 309mm
RoHS	Complaint

# Attenuator, DC~18GHz, N 250Watt 40dB, Uni-directional

P.N. : A-1840.NNI5.1

## Photo



## Test data

