


Attenuator, DC~18GHz, SMA(f,f) 50Watt 40dB, Uni-directional

P.N. : A-1840.SM50.2

Dimension

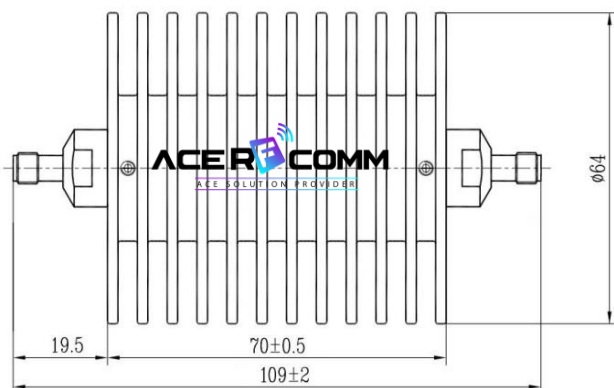

Photo



Electrical & Environmental specification

Frequency Range	DC ~ 18GHz
Impedance	50 Ohm
Input Ave Power	50Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	2.5kW (5 µsec pulse width, 1% duty cycle)
Nominal Attenuation	40dB ± 1.4dB
V.S.W.R.	1.45 : 1 Max
Direction	SMA female to SMA female
Operating Temperature	-55°C ~ 125 °C

Material specification

Connector Body	Tri-Alloy Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Black Anodizing, Aluminum
Weight	480 gram
Dimension	64 * 64 * 109mm
RoHS	Complaint

Attenuator, DC~18GHz, SMA(f,f) 50Watt 40dB, Uni-directional

P.N. : A-1840.SM50.2

Test Data

11/3/2022 3:33:54 PM
1311.6010K64-102774-Fw

