


# Attenuator, DC~26.5GHz, SMA 5Watt 10dB, Bi-directional

P.N. : A-2610.SM05.1

## Dimension

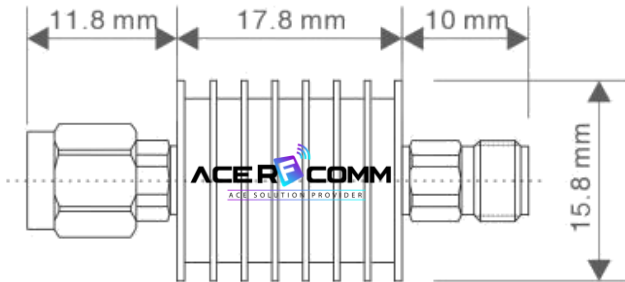

## Photo/3D Image



## Electrical & Environmental specification

Frequency Range	DC ~ 26.5GHz
Impedance	50 Ohm
Input Ave Power	10Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	0.05kW ( 5 µsec pulse width, 2.5% duty cycle)
Nominal Attenuation	10dB, -0.7 ~ +0.9dB
V.S.W.R.	1.30 : 1 Max
Operating Temperature	-55°C ~ 125 °C

## Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Weight	15 gram
Dimension	Ø15.8 * 38.7mm
RoHS	Complaint