


Waveguide Attenuator, WR28, 26.5~40GHz, 200Watt 30dB

P.N. : A-4030.28I0.S

Dimension

Photo

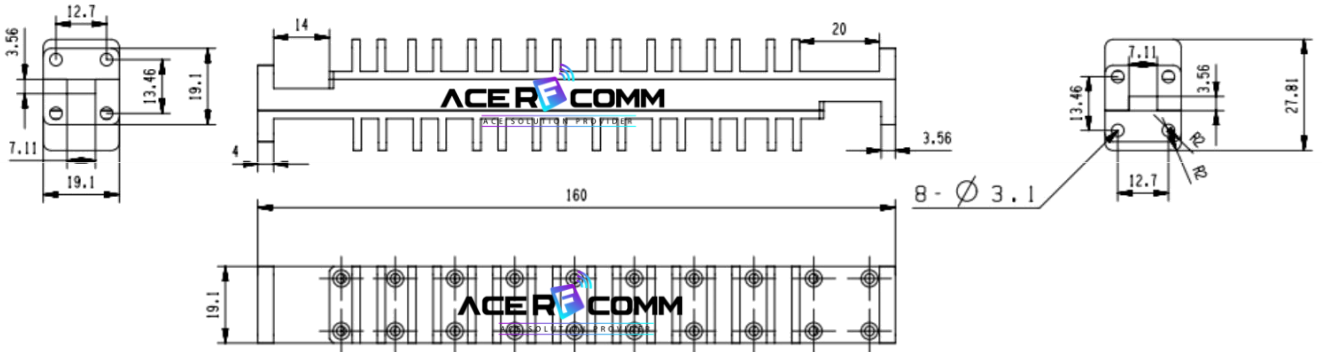

Electrical & Environmental specification

Frequency Range	26.5 ~ 40GHz
Impedance	50 Ohm
Input Ave Power	200Watt
Peak Power	2kW
Nominal Attenuation	30dB ± 1.6dB
V.S.W.R.	1.25 : 1 Max
Operating Temperature	-40°C ~ 85 °C

Material specification

Waveguide size	WR28 (R320)
Flange Type	IEC : UBR320
Waveguide Material	Aluminum
Internal Finish	Conductive Oxidation
External Finish	High Temp Black painted