



Attenuator, DC~40GHz, 2.92mm 2Watt 30dB, Bi-directional

P.N. : A-4030.2902.2

Dimension

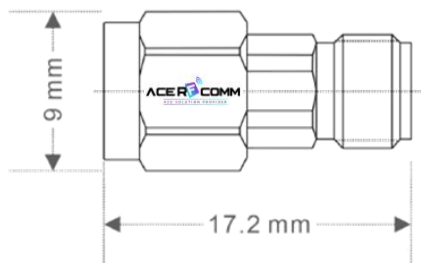

Photo

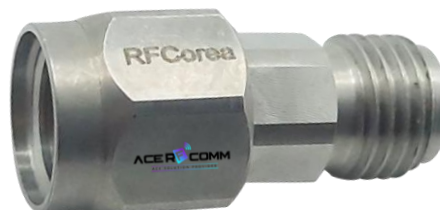

Electrical & Environmental specification

Frequency Range	DC ~ 40GHz
Impedance	50 Ohm
Input Ave Power	2Watt @ 25°C derated linearly to 0.2 watts @ 100°C
Peak Power	200Watt (5 µsec pulse width, 1% duty cycle)
Nominal Attenuation	30dB ± 1.2dB
V.S.W.R.	1.30 : 1 Max
Operating Temperature	-55°C ~ 100 °C

Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Weight	5 gram
Dimension	Ø9 * 17.2mm
RoHS	Complaint

Attenuator, DC~40GHz, 2.92mm 2Watt 30dB, Bi-directional

P.N. : A-4030.2902.2

Test Data

