


# Waveguide Attenuator, WR28, 26.5~40GHz, 200Watt 40dB

P.N. : A-4040.28I0.S

## Dimension

## Photo

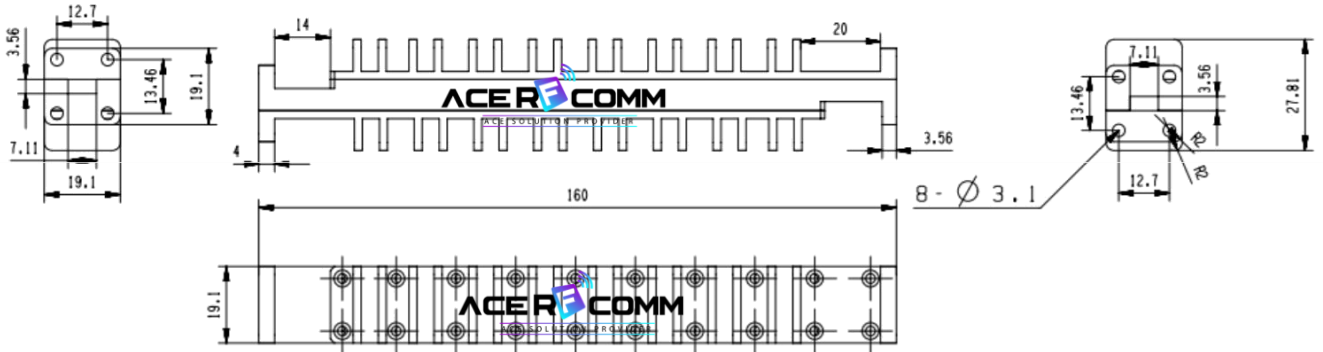

## Electrical & Environmental specification

Frequency Range	26.5 ~ 40GHz
Impedance	50 Ohm
Input Ave Power	200Watt
Peak Power	2kW
Nominal Attenuation	40dB $\pm$ 1.6dB
V.S.W.R.	1.25 : 1 Max
Operating Temperature	-40°C ~ 85 °C

## Material specification

Waveguide size	WR28 (R320)
Flange Type	IEC : UBR320
Waveguide Material	Aluminum
Internal Finish	Conductive Oxidation
External Finish	High Temp Black painted