


Attenuator, DC~50GHz, 2.4mm 2Watt 20dB, Bi-directional

P.N. : A-5020.2402.1

Dimension

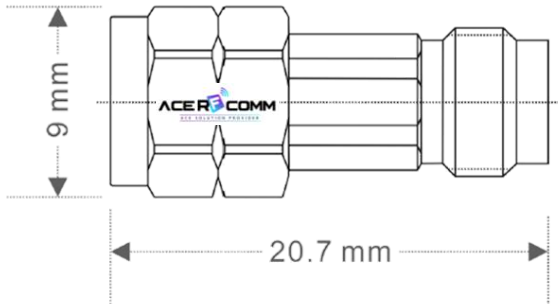

Photo/3D Image



Electrical & Environmental specification

Frequency Range	DC ~ 50GHz
Impedance	50 Ohm
Input Ave Power	2Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	20W (5 µsec pulse width, 1% duty cycle)
Nominal Attenuation	20dB ± 1.4dB
V.S.W.R.	1.35 : 1 Max
Operating Temperature	-55°C ~ 125 °C

Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Weight	5 gram
Dimension	Ø9 * 20.7mm
RoHS	Complaint

Attenuator, DC~50GHz, 2.4mm 2Watt 20dB, Bi-directional

P.N. : A-5020.2402.1

Test Data

