


DC Block, DC~40GHz, 2.92mm 60V

P.N. : D-K060.40G0.1

Dimension

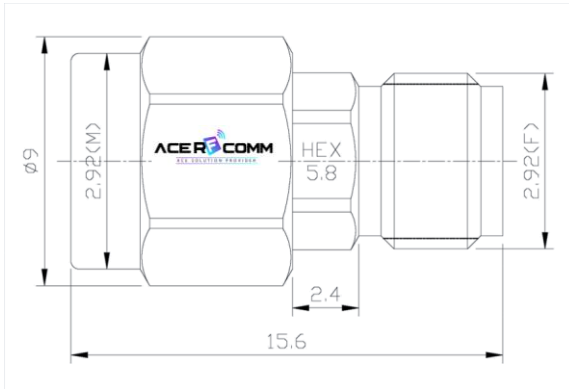

Photo



Electrical & Environmental specification

Frequency Range	10MHz ~ 40GHz
Impedance	50 Ohm
Input Ave Power	2Watt @ 25°C
Insertion loss	0.55dB Max.
Voltage	60V
V.S.W.R.	1.40 : 1 Max
Operating Temperature	-55°C ~ 85 °C


Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Weight	4 gram
Dimension	Ø9 * 15.2mm
RoHS	Complaint

DC Block, DC~40GHz, 2.92mm 60V


P.N. : D-K060.40G0.1

Test Data #1

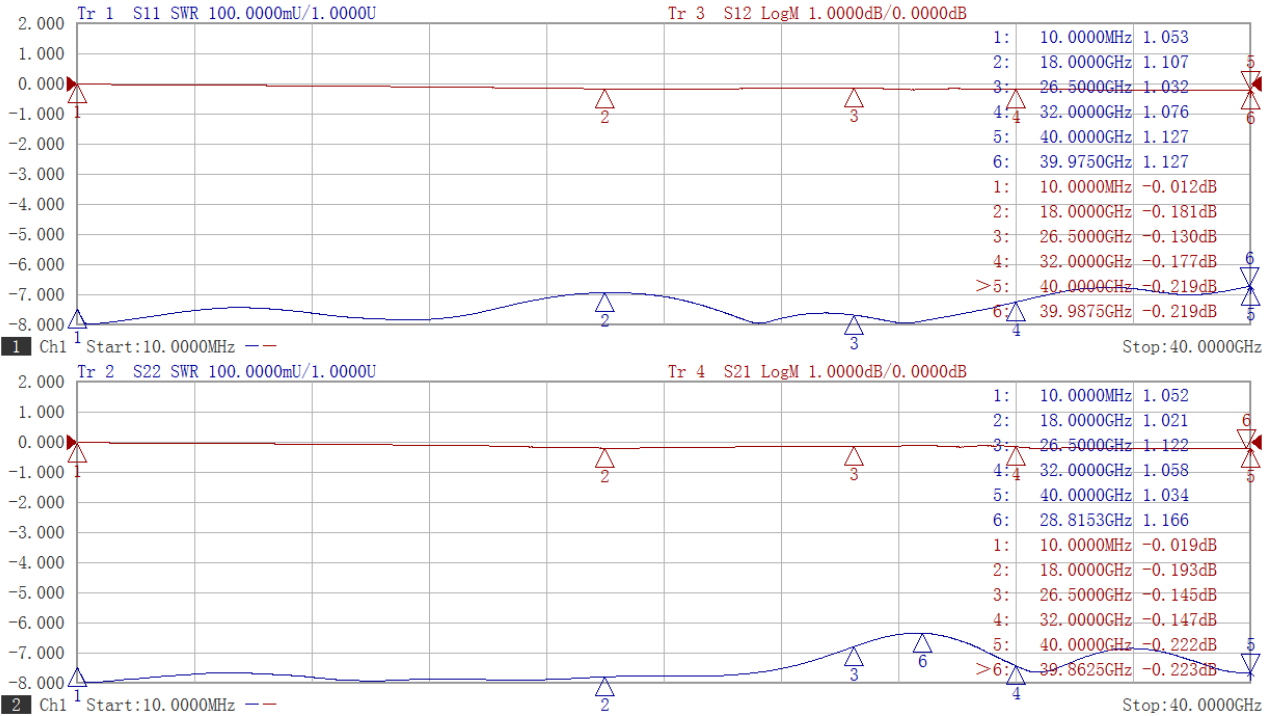

2021-06-19 17:26

Test Data #2

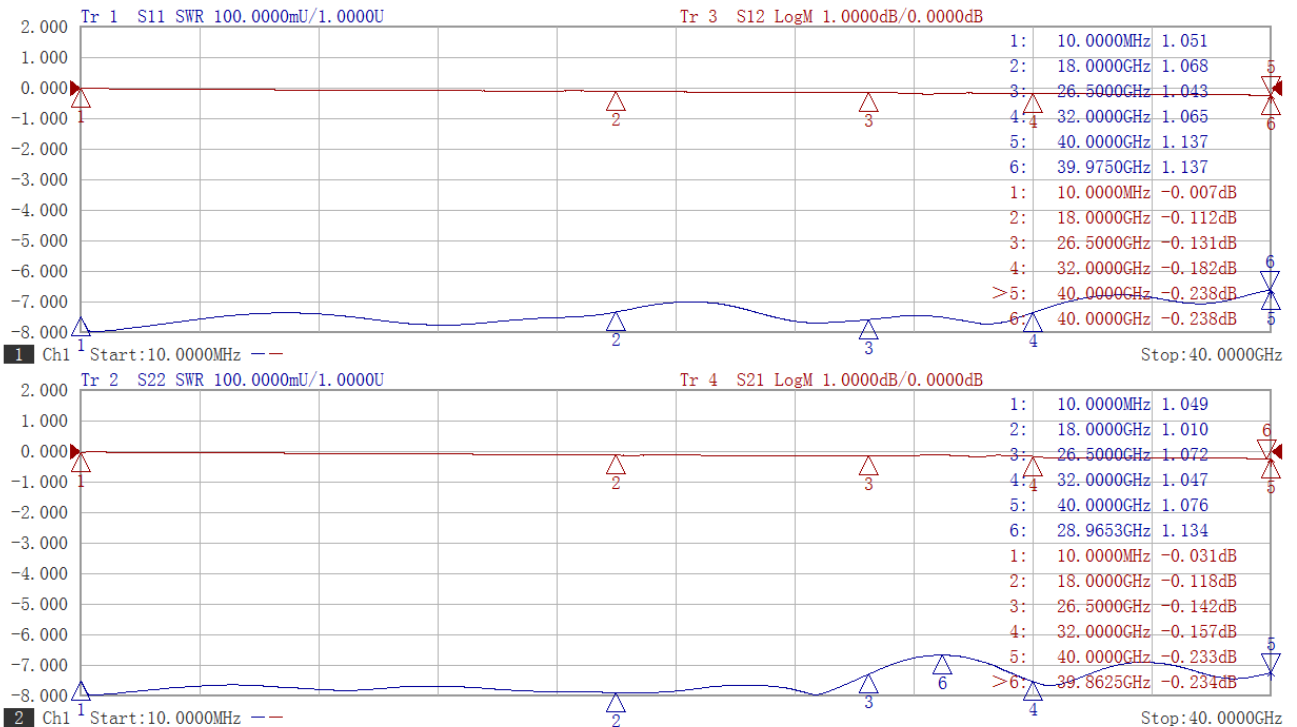

2021-06-19 17:27