


DC Block, 10MHz~50GHz, 2.4mm 60V

P.N. : D-K060.50G0.1

Dimension

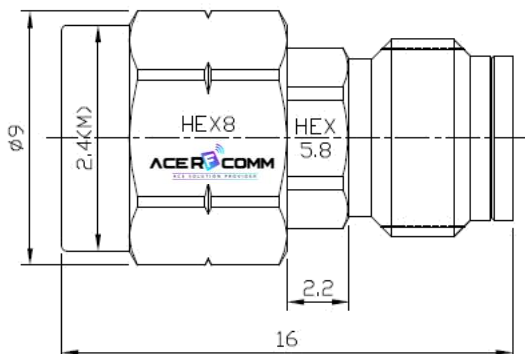

Photo



Electrical & Environmental specification

Frequency Range	10MHz ~ 50GHz
Impedance	50 Ohm
Input Ave Power	2Watt @ 25°C
Insertion loss	0.65dB Max.
Voltage	60V
V.S.W.R.	1.40 : 1 Max
Operating Temperature	-55°C ~ 85 °C

Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Weight	4 gram
Dimension	Ø9 * 16mm
RoHS	Complaint

DC Block, 10MHz~50GHz, 2.4mm 60V

P.N. : D-K060.50G0.1

Test Data

