


## DC Block, 10MHz~18GHz, N 250V

P.N. : D-N250.18G0.1

**Dimension**

**Photo**

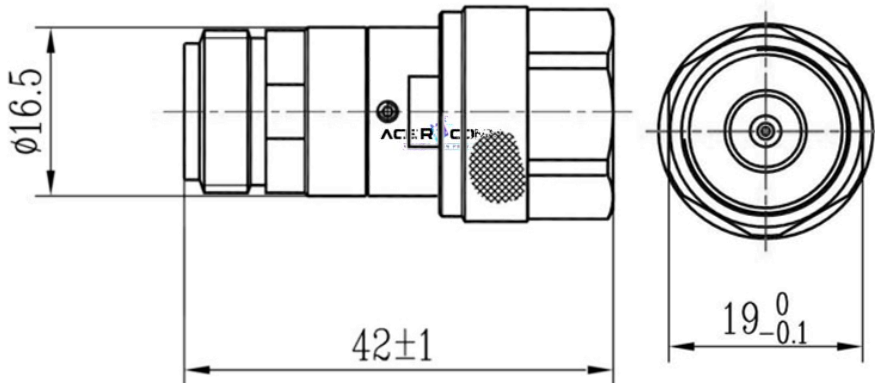

### Electrical & Environmental specification

Frequency Range	10MHz ~ 18GHz
Impedance	50 Ohm
Input Ave Power	2Watt @ 25°C
Insertion loss	0.7dB Max.
Voltage	250V
V.S.W.R.	1.35 : 1 Max
Operating Temperature	-55°C ~ 85 °C

### Material specification

Connector Body	Tri-Alloy Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Weight	50 gram
Dimension	Ø19 * 42mm
RoHS	Complaint

# DC Block, 10MHz~18GHz, N 250V

P.N. : D-N250.18G0.1

## Test Data

