


## DC Block, DC~8GHz, SMA 200V

P.N. : D-S200.08G0.1

### Dimension

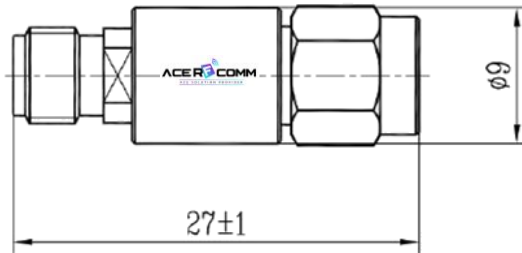

### Photo



### Electrical & Environmental specification

Frequency Range	10MHz ~ 8GHz
Impedance	50 Ohm
Input Ave Power	2Watt @ 25°C
Insertion loss	0.40 dB Max.
Voltage	200V
V.S.W.R.	1.25 : 1 Max
Operating Temperature	-55°C ~ 85 °C

### Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Weight	8 gram
Dimension	Ø9 * 27mm
RoHS	Complaint