


DC Block, DC~12.4GHz, SMA 200V

P.N. : D-S200.12G0.1

Dimension

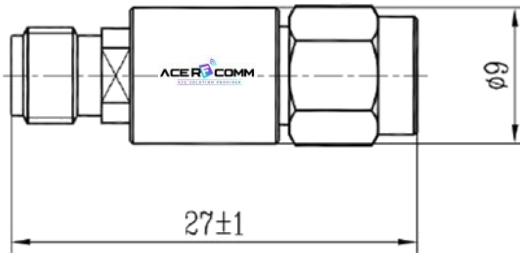

Photo



Electrical & Environmental specification

Frequency Range	10MHz ~ 12GHz
Impedance	50 Ohm
Input Ave Power	2Watt @ 25°C
Insertion loss	0.5 dB Max.
Voltage	200V
V.S.W.R.	1.30 : 1 Max
Operating Temperature	-55°C ~ 85 °C

Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Weight	8 gram
Dimension	Ø9 * 27mm
RoHS	Complaint