


Directional Coupler, N, 600Watt, 40dB, Single, 3300~6000MHz

P.N. : H-3300.6000.40R

Dimension

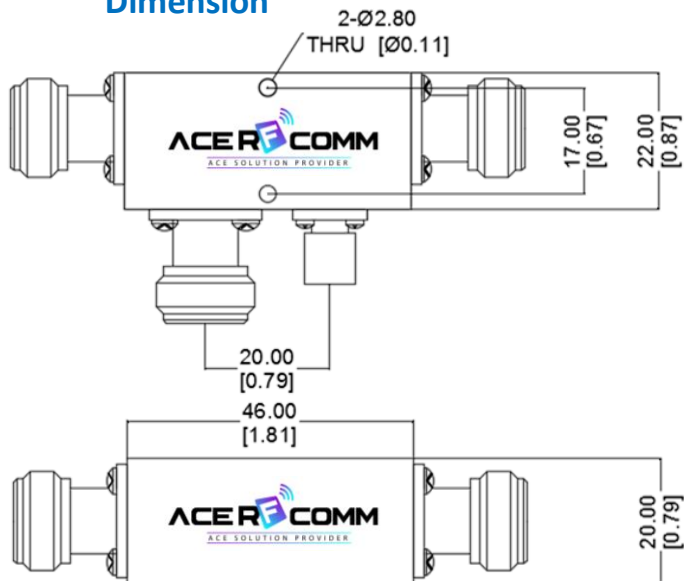

Photo



Electrical & Environmental specification

Frequency Range	3300~6000MHz
Impedance	50 Ohm
Input Ave Power	600Watt @ 25°C
Coupling Value	40dB ±1.1 dB
Directivity	15dB Min.
V.S.W.R.	1.35 : 1 Max.
Insertion Loss	0.5dB Max
Operating Temperature	-40°C ~ 75 °C

Material specification

Connector Body	Tri-Alloy or Nickel Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Aluminum
RoHS	Complaint

Directional Coupler, N, 600Watt, 40dB, Single, 3300~6000MHz

P.N. : H-3300.6000.40R

Test Data

