


# Directional Coupler, N, 200Watt, 10dB, 400MHz~4.0GHz, Single

P.N. : H-M400.4000.10

## Dimension

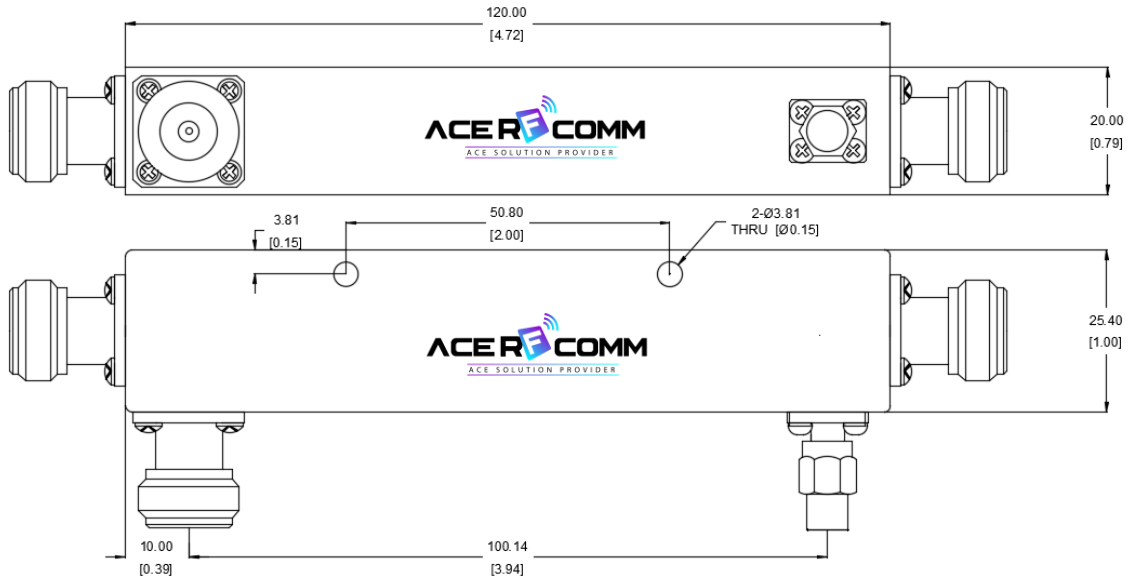

## Photo



## Electrical & Environmental specification

Frequency Range	400MHz ~ 4.0GHz
Impedance	50 Ohm
Input Ave Power	200Watt @ 25°C
Coupling Value	10dB ±1.2 Typ.
Coupling Flatness	+/-1.0dB
Directivity	15dB Min.
V.S.W.R.	1.35 : 1 Max.
Insertion Loss	0.7 dB Max
Operating Temperature	-30°C ~ 80 °C


# Directional Coupler, N, 200Watt, 10dB, 400MHz~4.0GHz, Single

P.N. : H-M400.4000.10

## Material specification

N Connector Body	Brass, Nickel/Tri-alloy Plated
Connector Center Contact (Female)	BeCu, Gold Plated
Connector Mating	500 cycles
Housing	Aluminum
Dimension	120 * 20 * 25 mm (Excluding connector)
RoHS	Complaint

## Test Data

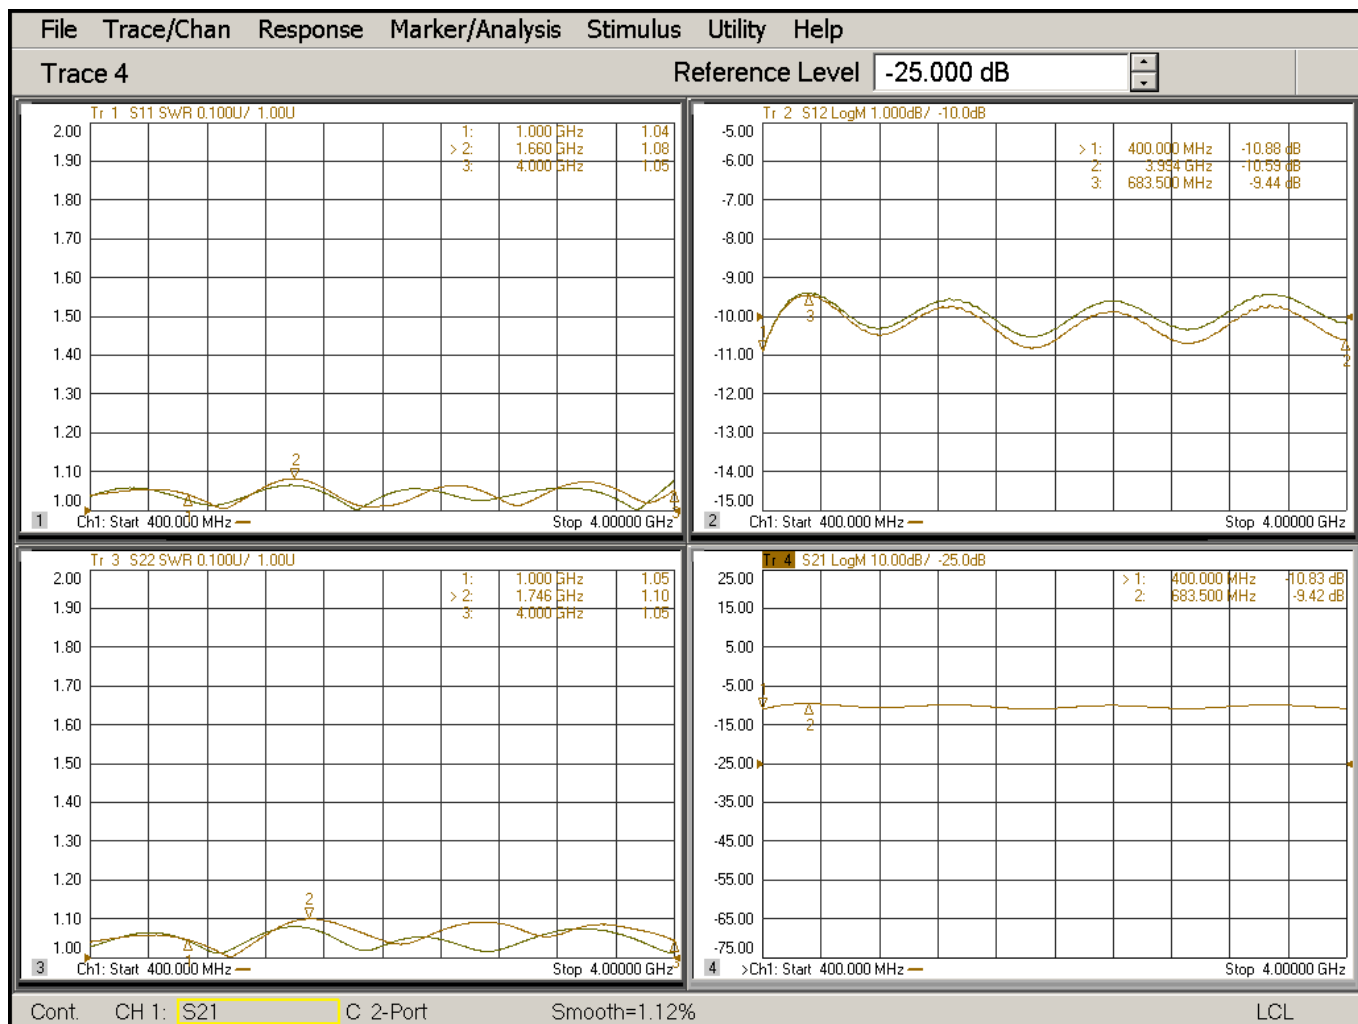

# Directional Coupler, N, 200Watt, 10dB, 400MHz~4.0GHz, Single

P.N. : H-M400.4000.10

## Test Data

