


Directional Coupler, N, 200Watt, 20dB, 400MHz~4.0GHz, Single

P.N. : H-M400.4000.20

Dimension

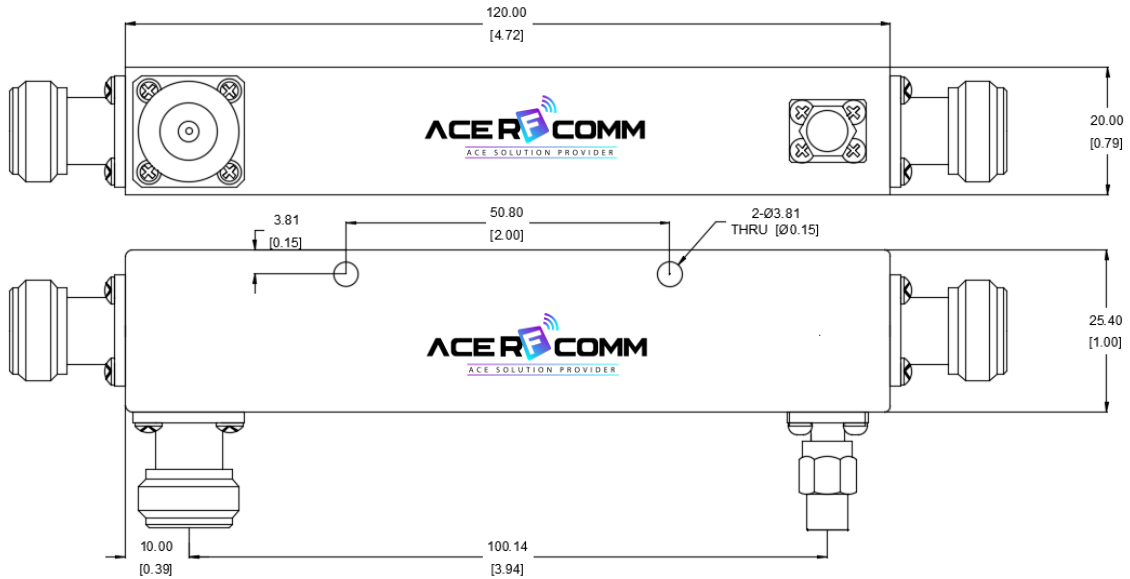

Photo



Electrical & Environmental specification

| | |
|-----------------------|-----------------|
| Frequency Range | 400MHz ~ 4.0GHz |
| Impedance | 50 Ohm |
| Input Ave Power | 200Watt @ 25°C |
| Coupling Value | 20dB ±1.2 Typ. |
| Coupling Flatness | +/-1.0dB |
| Directivity | 15dB Min. |
| V.S.W.R. | 1.35 : 1 Max. |
| Insertion Loss | 0.7 dB Max |
| Operating Temperature | -30°C ~ 80 °C |


Directional Coupler, N, 200Watt, 20dB, 400MHz~4.0GHz, Single

P.N. : H-M400.4000.20

Material specification

| | |
|-----------------------------------|---|
| N Connector Body | Brass, Nickel/Tri-alloy Plated |
| Connector Center Contact (Female) | BeCu, Gold Plated |
| Connector Mating | 500 cycles |
| Housing | Aluminum |
| Dimension | 120 * 20 * 25 mm (Excluding connector) |
| RoHS | Complaint |

Test Data

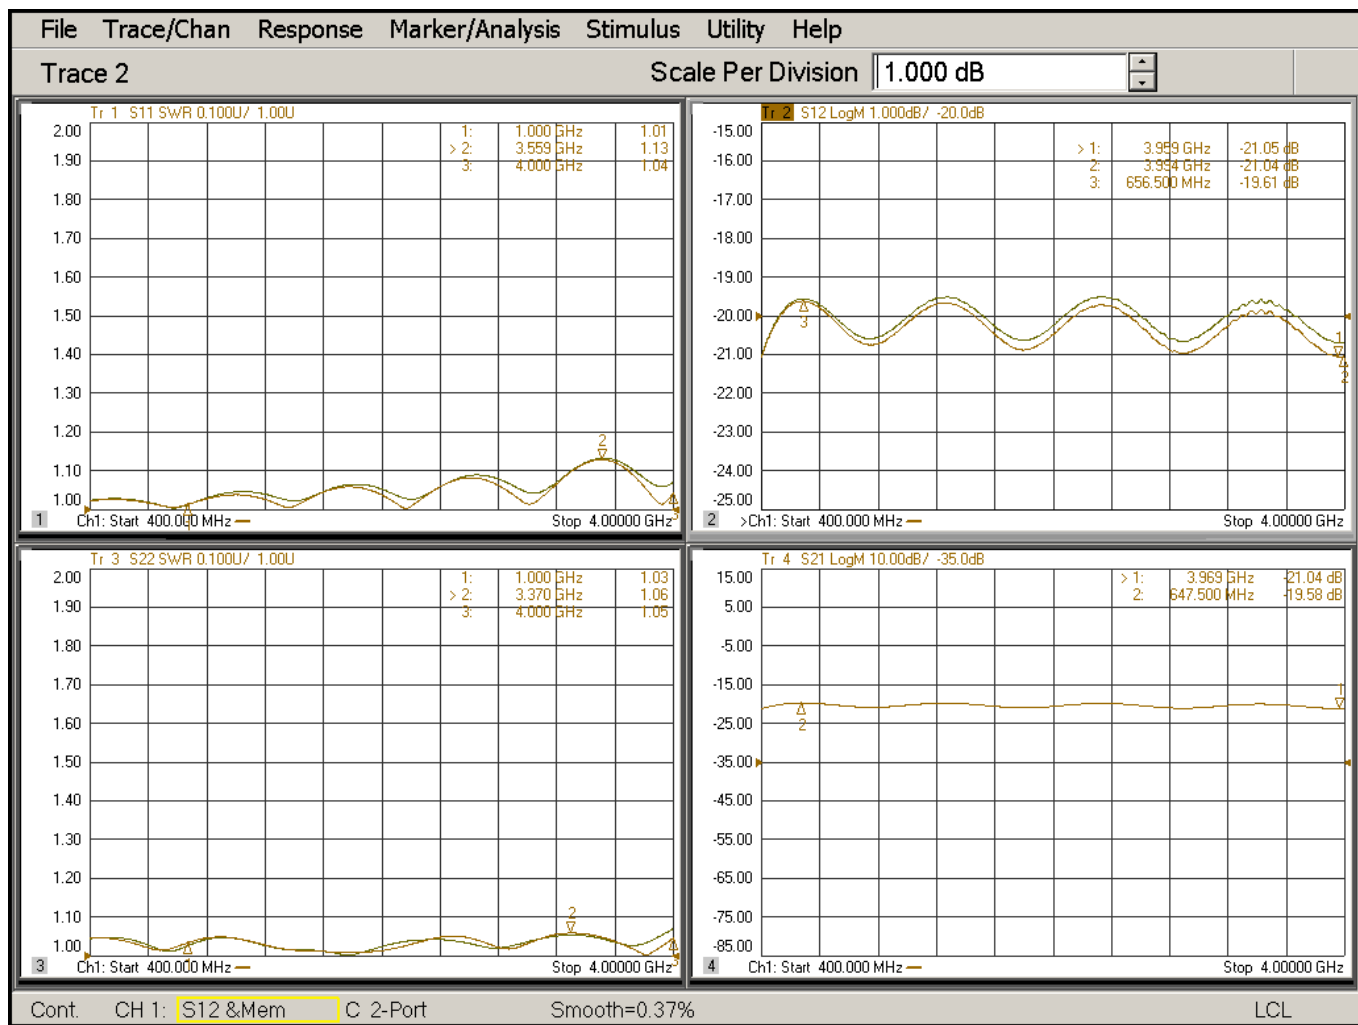

Directional Coupler, N, 200Watt, 20dB, 400MHz~4.0GHz, Single

P.N. : H-M400.4000.20

Test Data

