


Directional Coupler, N, 50Watt, 20dB, Single, 700~6000MHz

P.N. : H-M700.6000.20

Dimension

Photo

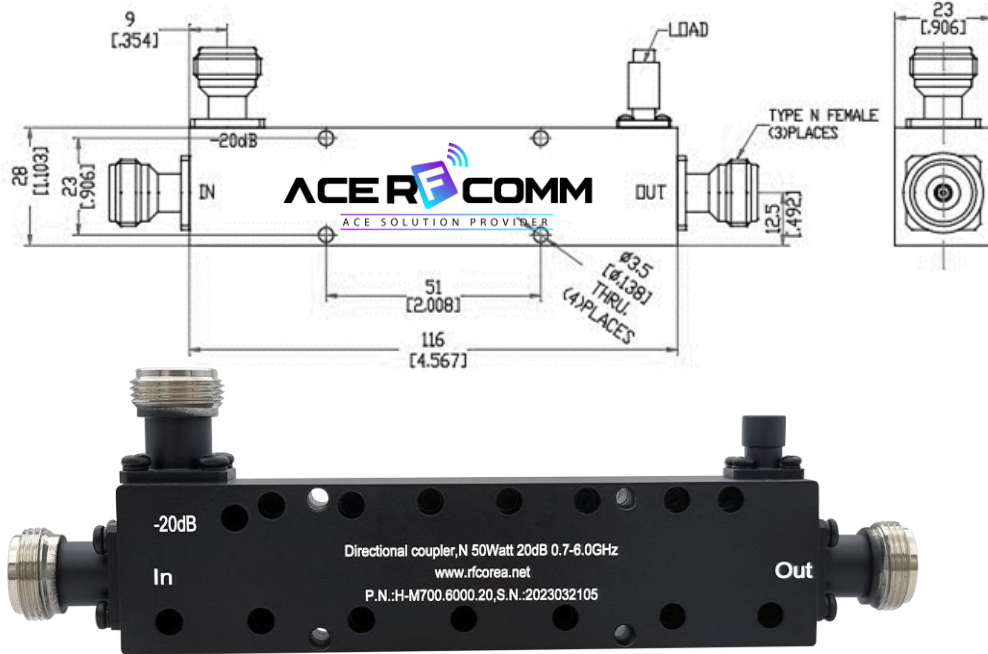

Electrical & Environmental specification

Frequency Range	700~6000MHz
Impedance	50 Ohm
Input Ave Power	50Watt @ 25°C
Coupling Value	20dB ± 1.2 dB
Flatness	±0.8 dB
V.S.W.R.	1.35 : 1 Max.
Insertion Loss	0.7dB Max (excluding coupling loss 0.05dB)
Operating Temperature	-40°C ~ 75 °C

Material specification

Connector Body	Nickel Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Aluminum
RoHS	Complaint