


Isolator, SMA 60Watt 3.0 ~6.0 GHz

P.N. : I-G003.006S.1

Dimension

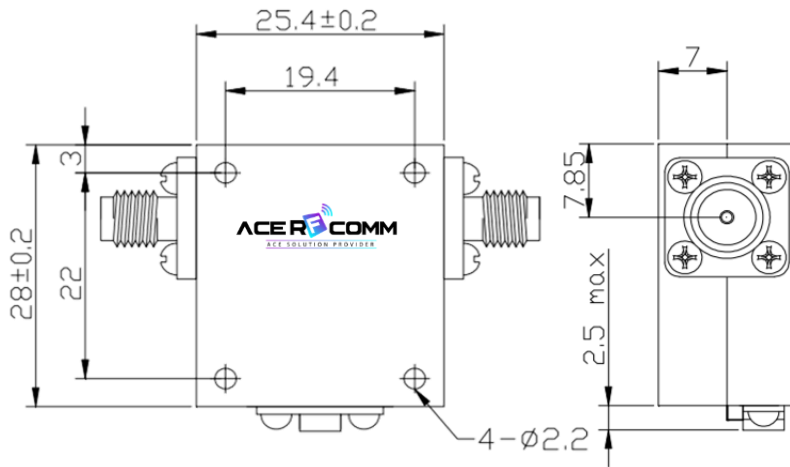

Photo/3D Image



Electrical & Environmental specification

Frequency Range	3.0 ~ 6.0 GHz
Impedance	50 Ohm
Insertion Loss	< 0.7dB
Isolation	> 17dB
Forward Power	60 Watts CW
Reverse Power	20Watts
V.S.W.R.	1.40 : 1 Max
Direction	Clockwise
Working Temperature	-10°C ~ +60°C

Material specification

Connector Body	Gold or Tri-alloy plating Brass
Connector Center Contact	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Aluminum
Dimension	28 * 25.4 * 21 mm
RoHS	Complaint