


Power Divider, 1~18GHz, SMA 2Way 20Watt

P.N. : P-0118.S220.1

Photo & Dimension

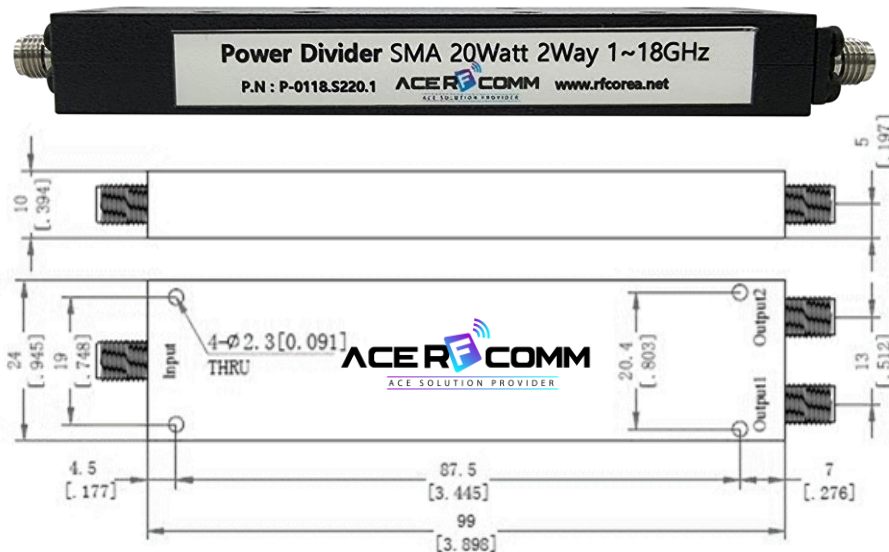

Electrical & Environmental specification

Frequency Range		1 ~ 18GHz
Impedance		50 Ohm
Insertion Loss		1.25dB Max
VSWR		1.25 Typical (1.45 : 1 Max)
Amplitude Balance		± 0.3dB
Phase Balance		3 Degree Max
Isolation		25dB Typical , (17dB Min)
Power	As divider	20Watt @ 25°C
	As combiner	1Watt @ 25°C
Connectors		SMA Female connector
Surface Finish		Blue or Black painting
Temperature		-45°C ~ 85 °C


Material specification

Connector Body	Passivated, Stainless Steel
Connector Center Contacts (Female)	Gold Plating BeCu
Housing	Aluminum
Other Screw	Stainless Steel
Dimension	99 * 24 * 10 mm
Weight	65 gram

Power Divider, 1~18GHz, SMA 2Way 20Watt

P.N. : P-0118.S220.1

Test Data

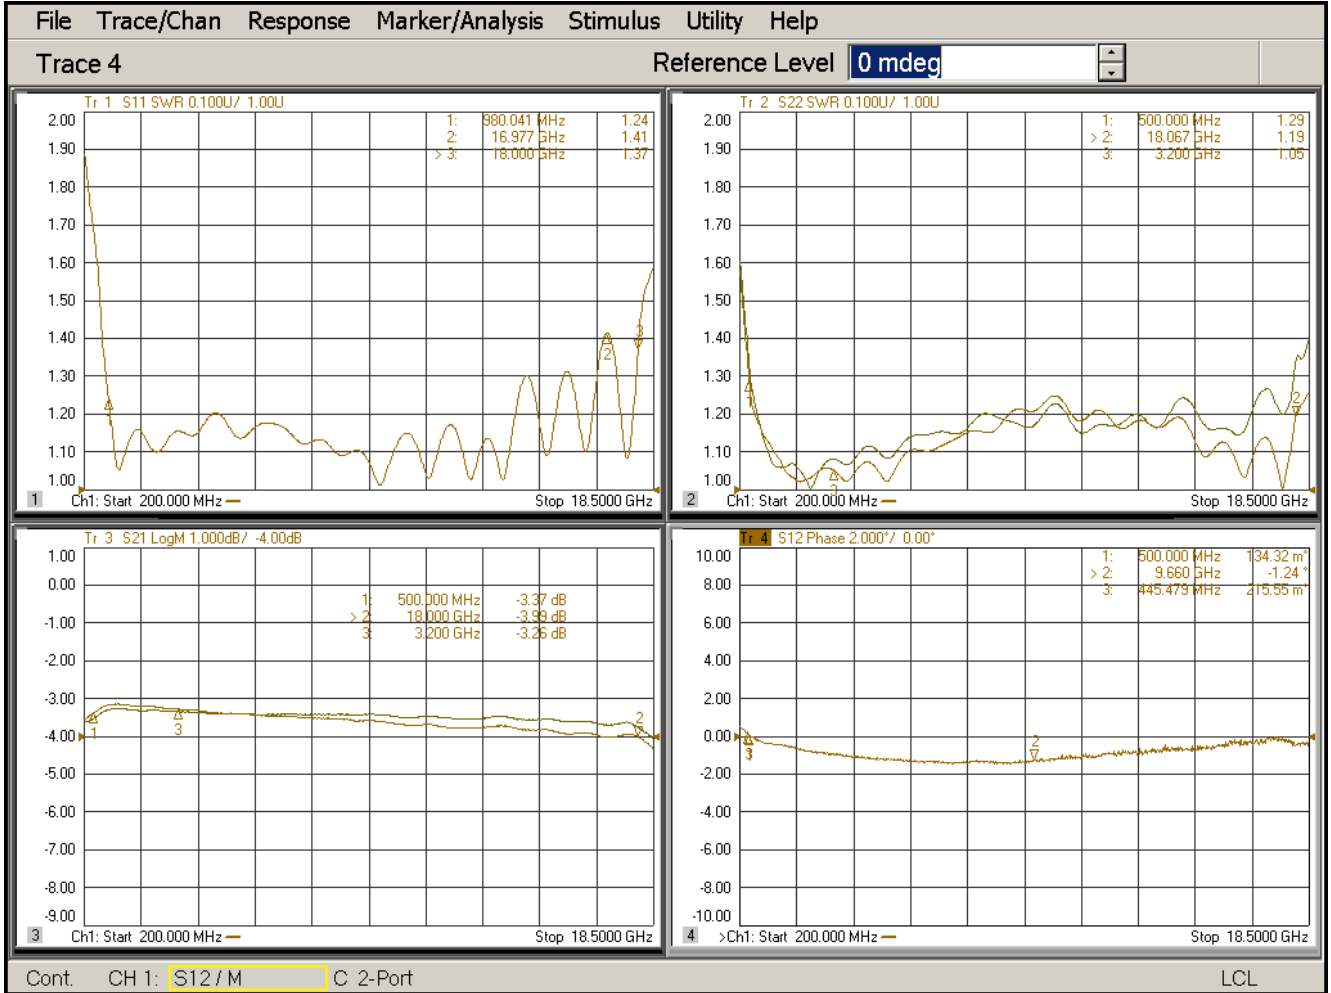

Power Divider, 1~18GHz, SMA 2Way 20Watt

P.N. : P-0118.S220.1

Test Data

