


Power Divider, 1.0~26.5GHz, SMA 4Way 20Watt

P.N. : P-0126.S420.1

Dimension

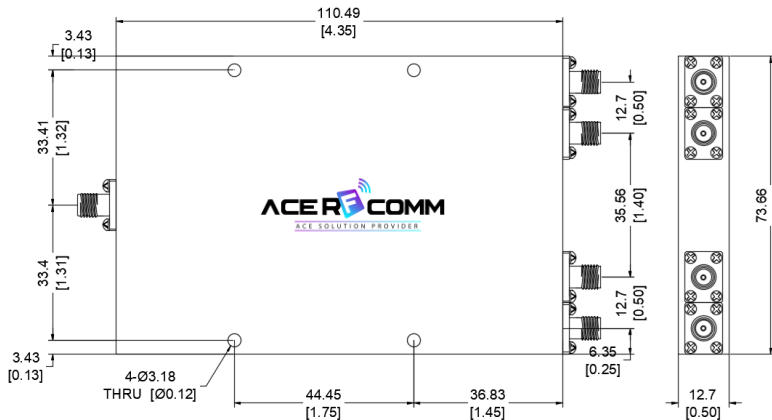

Photo



Electrical & Environmental specification

| | |
|-------------------|------------------------|
| Frequency Range | 1.0 ~ 26.5GHz |
| Impedance | 50 Ohm |
| Insertion Loss | 3.5dB Max |
| VSWR | 1.65 : 1 Max |
| Amplitude Balance | ± 0.5dB |
| Phase Balance | 5 Degree Max |
| Isolation | 17dB Min |
| Power | 20Watt @ 25°C |
| Connectors | SMA Female connector |
| Surface Finish | Blue or Black painting |
| Temperature | -32°C ~ 85 °C |


Material specification

| | |
|------------------------------------|--------------------|
| Connector Body | Gold Plating Brass |
| Connector Center Contacts (Female) | Gold Plating BeCu |
| Housing | Aluminum |
| Other Screw | Stainless Steel |

Power Divider, 1.0~26.5GHz, SMA 4Way 20Watt

P.N. : P-0126.S420.1

Test Data

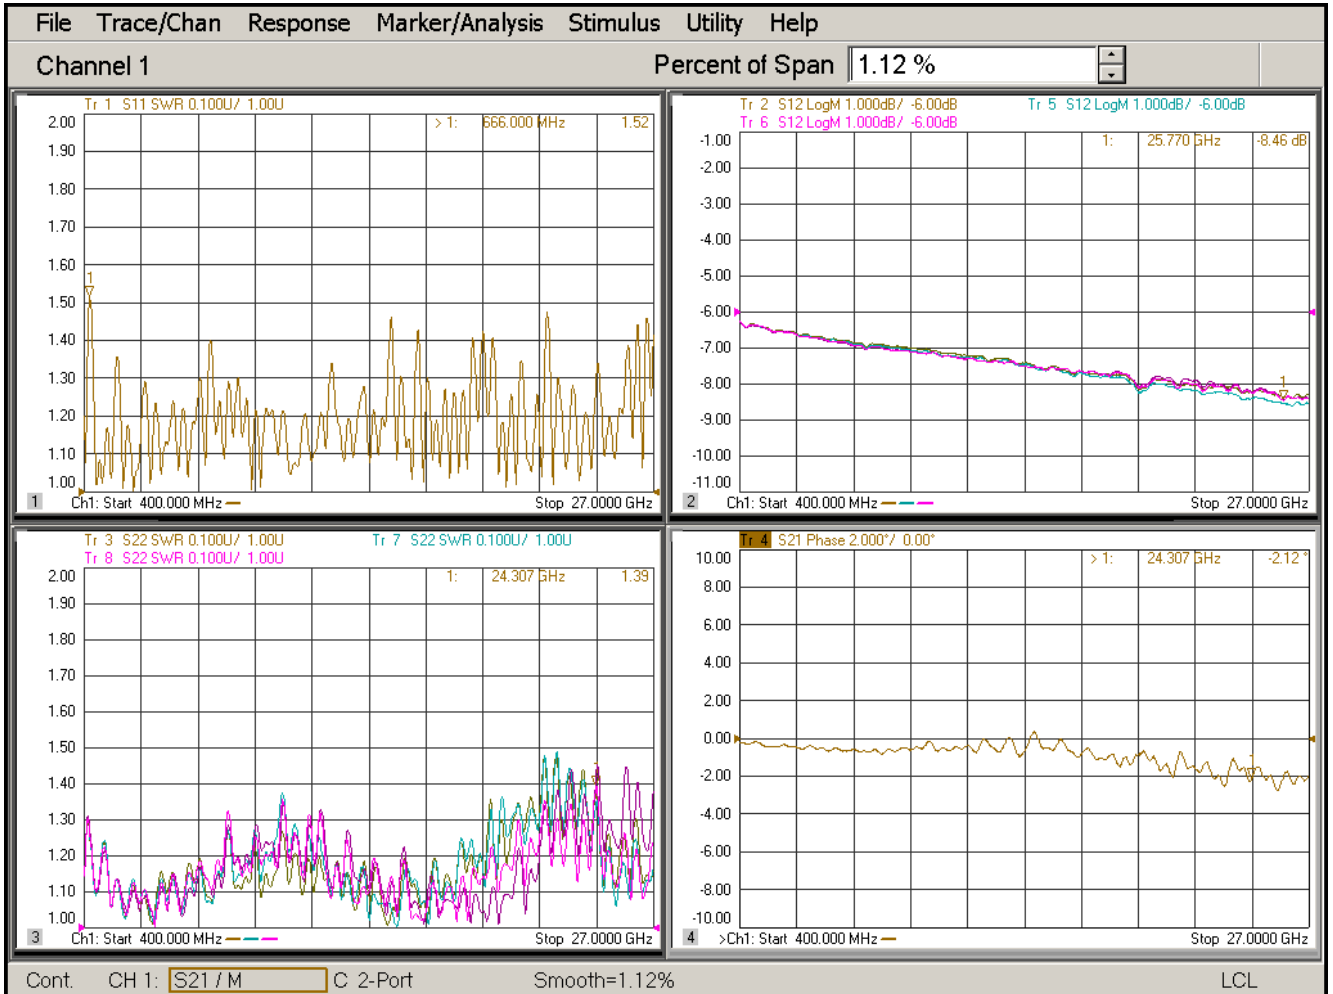

Power Divider, 1.0~26.5GHz, SMA 4Way 20Watt

P.N. : P-0126.S420.1

Test Data

