


Power Divider, 2~18GHz, SMA 2Way 20Watt

P.N. : P-0218.S220.1

Dimension

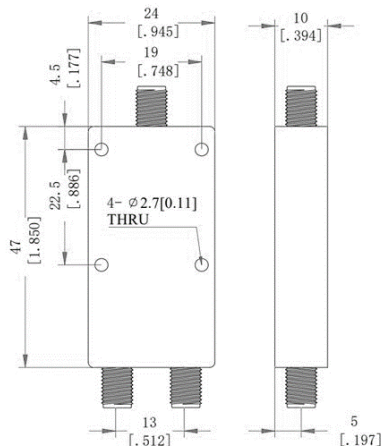

Photo



Electrical & Environmental specification

Frequency Range		2 ~ 18GHz
Impedance		50 Ohm
Insertion Loss		1.0dB Max
VSWR		1.35 : 1 Max
Amplitude Balance		± 0.3dB
Phase Balance		4 Degree Max
Isolation		17dB Min
Power	As divider	20Watt @ 25°C
	As combiner	1Watt @ 25°C
Connectors		SMA Female connector
Surface Finish		Blue or Black painting
Temperature		-45°C ~ 85 °C

Material specification

Connector Body	Passivated, Stainless Steel
Connector Center Contacts (Female)	Gold Plating BeCu
Housing	Aluminum
Other Screw	Stainless Steel

Power Divider, 2~18GHz, SMA 2Way 20Watt

P.N. : P-0218.S220.1

Test Data

