


Power Divider, 4~40GHz, 2.92mm 4Way 20Watt

P.N. : P-0440.K420.1

Photo/3D Image



Dimension

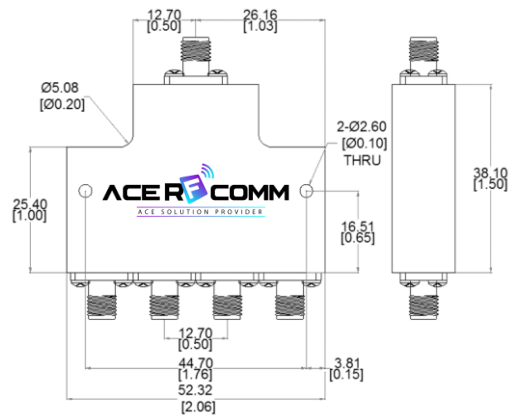

(Connector port locations can be changed, upon requesting spec.)

Electrical & Environmental specification

Frequency Range	4 ~ 40GHz
Impedance	50 Ohm
Insertion Loss	2.5dB Max
VSWR	1.65 : 1 Max
Amplitude Balance	± 0.7dB
Phase Balance	10 Degree Max
Isolation	15dB Min
Power	20Watt @ 25°C
Connectors	2.92mm Female connector
Surface Finish	Blue or Black painting
Temperature	-30°C ~ 60 °C


Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact (Female)	Gold Plating BeCu
Housing	Aluminum
Other Screw	Stainless Steel

Power Divider, 0.4~40GHz, 2.92mm 4Way 20Watt

P.N. : P-0440.K420.1

Test Data

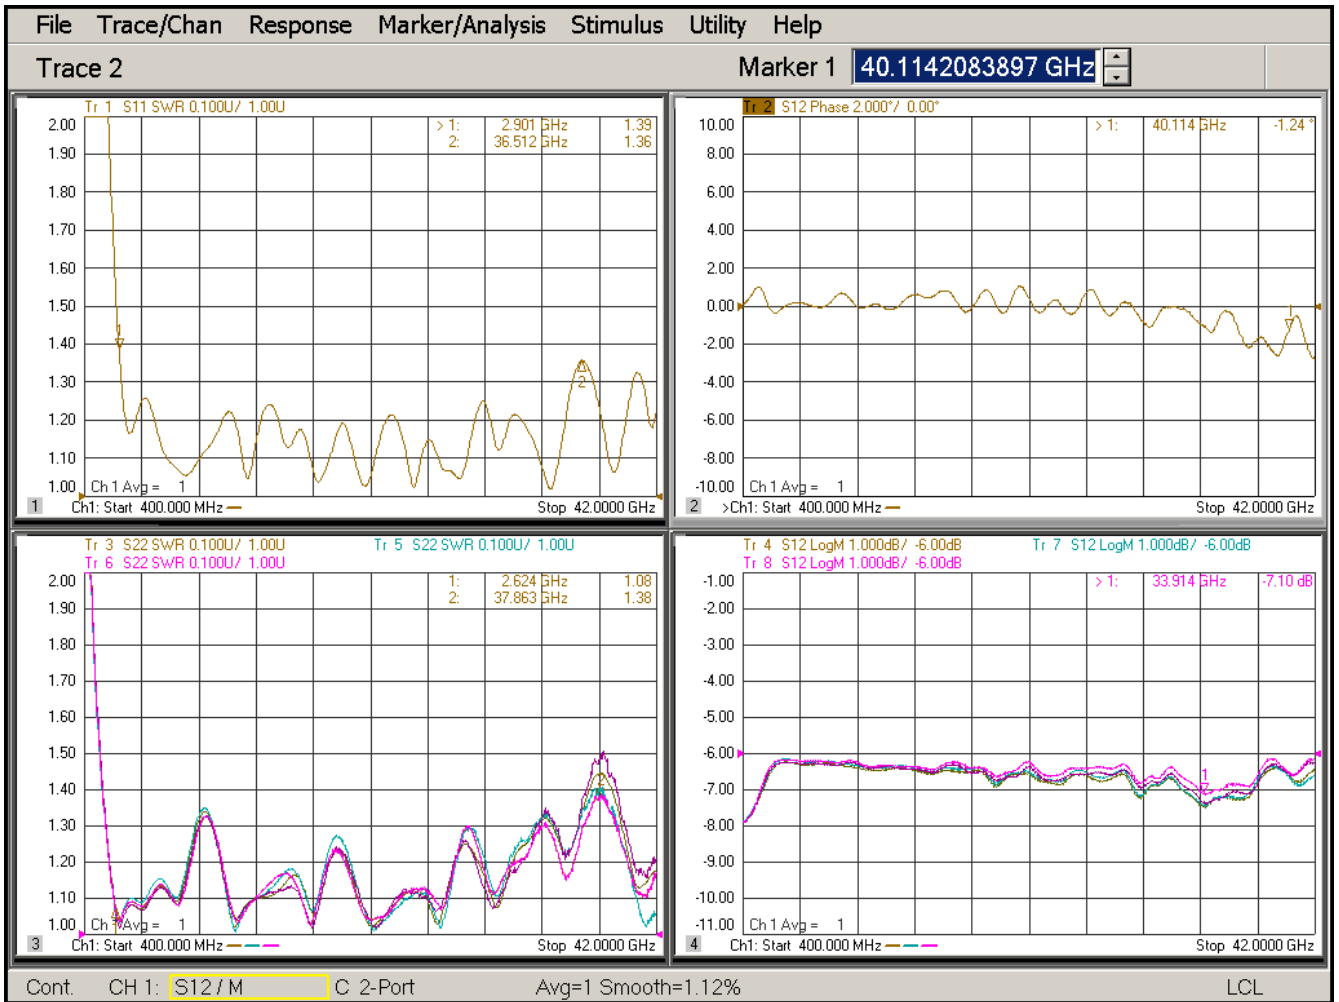

Power Divider, 0.4~40GHz, 2.92mm 4Way 20Watt

P.N. : P-0440.K420.1

Test Data

