


Power Divider, 6~18GHz, SMA 2Way 20Watt

P.N. : P-0618.S220.1

Photo/3D Image



Dimension

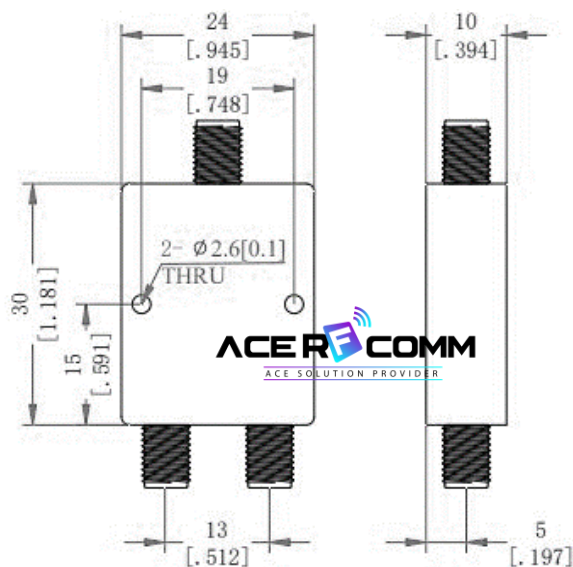

Electrical & Environmental specification

Frequency Range		6 ~ 18GHz
Impedance		50 Ohm
Insertion Loss		0.9dB Max
VSWR		1.35 : 1 Max
Amplitude Balance		± 0.3dB
Phase Balance		3 Degree Max
Isolation		17dB Min
Power	as Divider	20Watt @ 25°C
	as Combiner	1Watt @ 25°C
Connectors		SMA Female connector
Surface Finish		Blue or Black painting
Temperature		-45°C ~ 85 °C

Material specification

Connector Body	Tri-alloy or Gold Plating Brass
Connector Center Contacts (Female)	Gold Plating BeCu
Housing	Aluminum
Other Screw	Stainless Steel

Power Divider, 6~18GHz, SMA 2Way 20Watt

P.N. : P-0618.S220.1

Test data

