


# Power Divider, 18~50GHz, 2.4mm 2Way 10Watt

P.N. : P-1850.M210.1

## Photo/3D Image



## Dimension

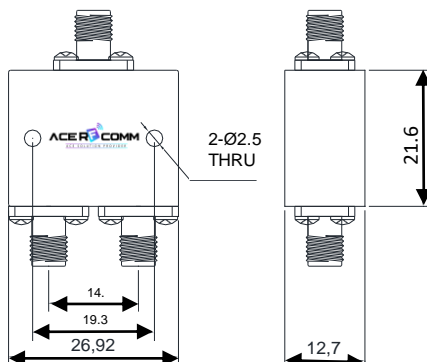

## Electrical & Environmental specification

Frequency Range		18 ~ 50GHz
Impedance		50 Ohm
Insertion Loss		1.9dB Max
VSWR	Input	1.80 : 1 Max
	Output	1.80 : 1 Max
Amplitude Balance		± 0.7dB
Phase Balance		6 Degree Max
Isolation		15dB Min
Power		10Watt @ 25°C
Connectors		2.4mm Female connector
Surface Finish		Blue or Black painting
Temperature		-30°C ~ 60 °C


## Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contacts (Female)	Gold Plating BeCu
Housing	Aluminum
Other Screw	Stainless Steel

# Power Divider, 18~50GHz, 2.4mm 2Way 10Watt

P.N. : P-1850.M210.1


## Test Data

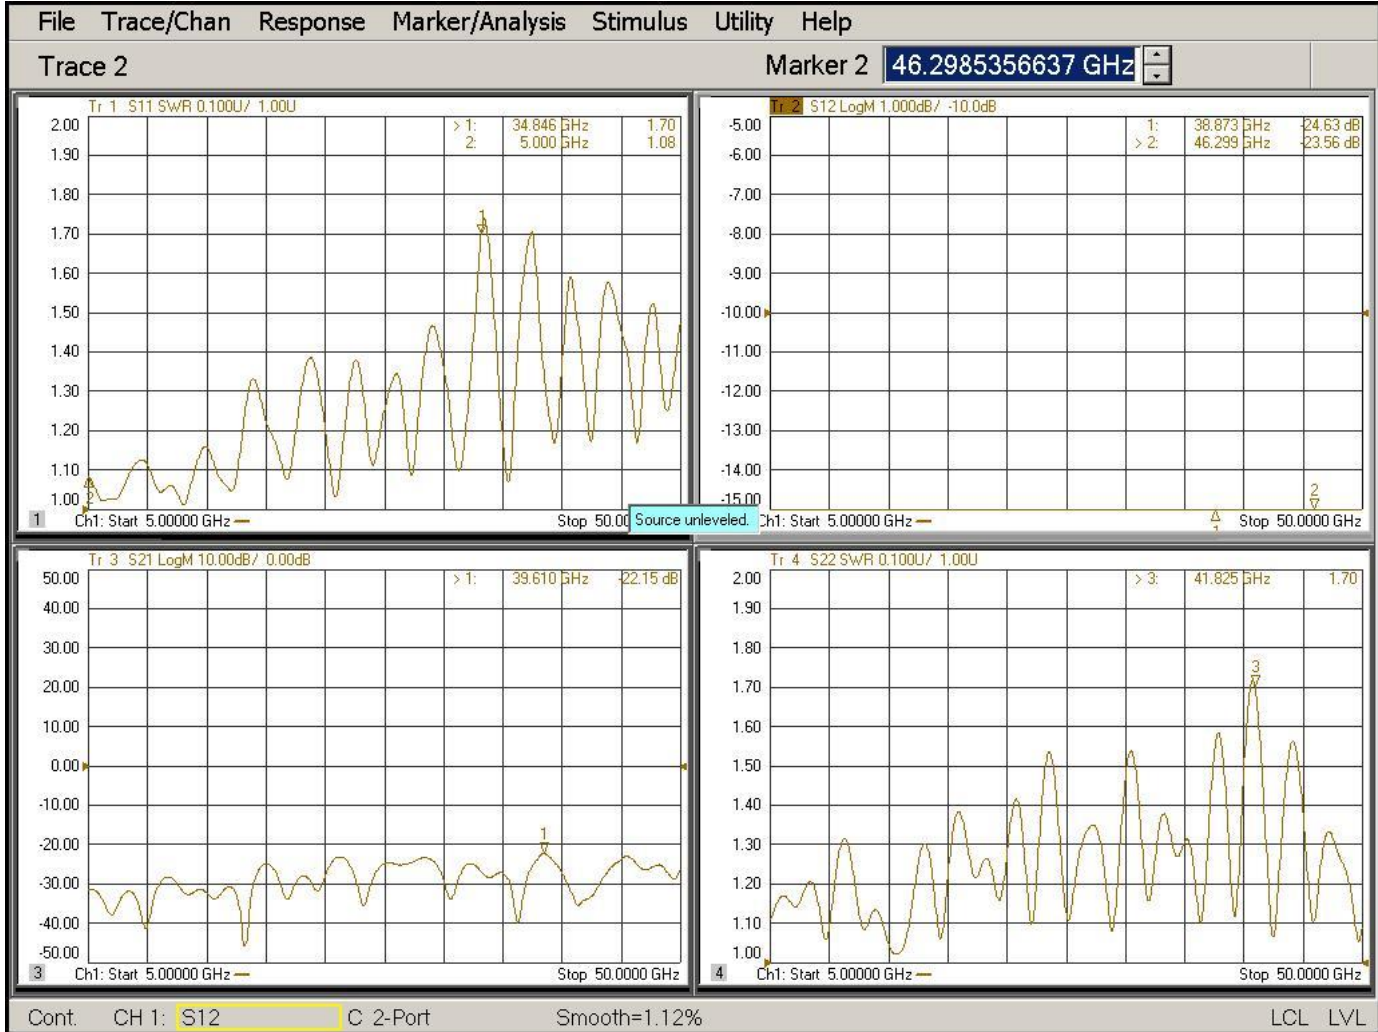

# Power Divider, 18~50GHz, 2.4mm 2Way 10Watt

P.N. : P-1850.M210.1

## Test Data

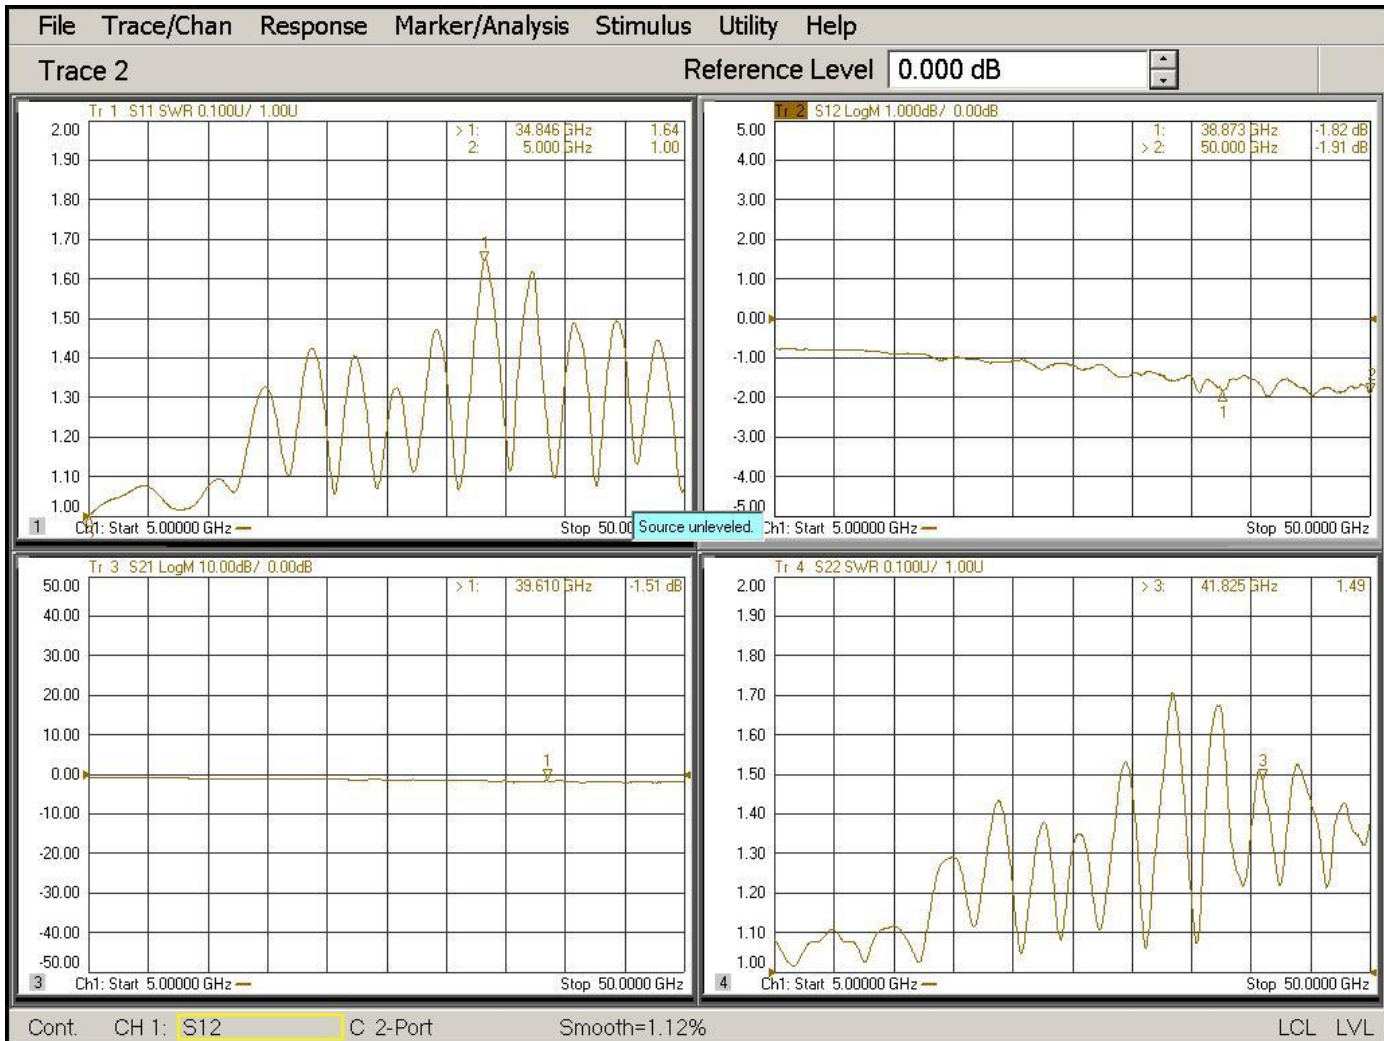

# Power Divider, 18~50GHz, 2.4mm 2Way 10Watt

P.N. : P-1850.M210.1

## Test Data

