


Power Divider, 25~40GHz, 2.92mm 4Way 10Watt

P.N. : P-2540.K410.1

Photo/3D Image



Dimension

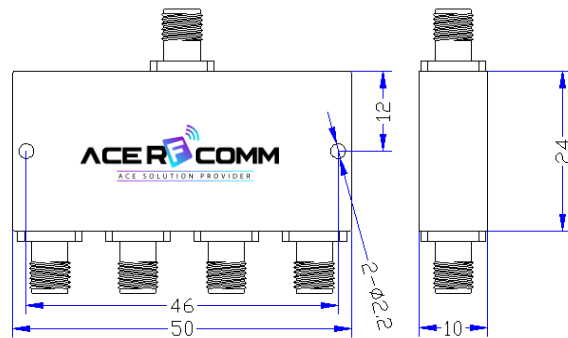

Electrical & Environmental specification

| | | |
|-------------------|--------|-------------------------|
| Frequency Range | | 25 ~ 40GHz |
| Impedance | | 50 Ohm |
| Insertion Loss | | 2.3dB Max |
| VSWR | Input | 1.70 : 1 Max |
| | Output | 1.70 : 1 Max |
| Amplitude Balance | | ± 0.7dB |
| Phase Balance | | 9 Degree Max |
| Isolation | | 16dB Min |
| Power | | 10Watt @ 25°C |
| Connectors | | 2.92mm Female connector |
| Surface Finish | | Blue or Black painting |
| Temperature | | -30°C ~ 60 °C |

Material specification

| | |
|------------------------------------|----------------------------|
| Connector Body | Passivated Stainless Steel |
| Connector Center Contacts (Female) | Gold Plating BeCu |
| Housing | Aluminum |
| Other Screw | Stainless Steel |