


# Power Divider, 50~500MHz, N 2Way 10Watt

P.N. P-505H.N210.1

## Dimension

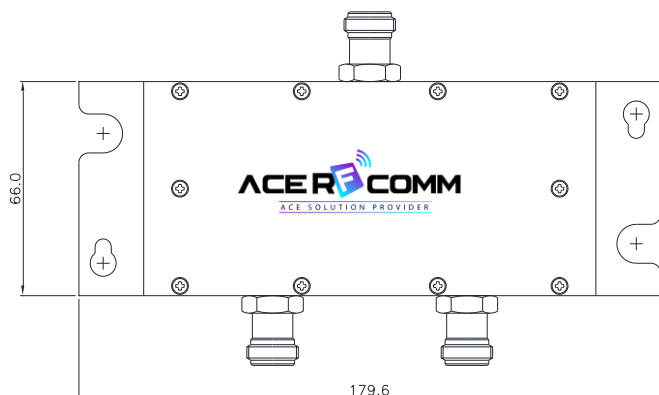

## Photo



## Electrical & Environmental specification

Frequency Range		50 ~ 500MHz
Impedance		50 Ohm
Insertion Loss		4.2dB Max
VSWR		1.50 : 1 Max
Isolation		18dB Min
Power	Forward	10Watt @ 25°C
	Reverse	1 Watt @ 25°C
Connectors		N Female connector
Temperature		-30°C ~ 60 °C

## Material specification

Connector Body	Brass, Nickel Plating
Connector Center Contacts (Female)	BeCu, Silver Plating
Housing	Aluminum
Other Screw	Stainless Steel