


Power Divider, 0.5~6GHz, SMA 3Way 20Watt

P.N. : P-M506.S320.1

Dimension

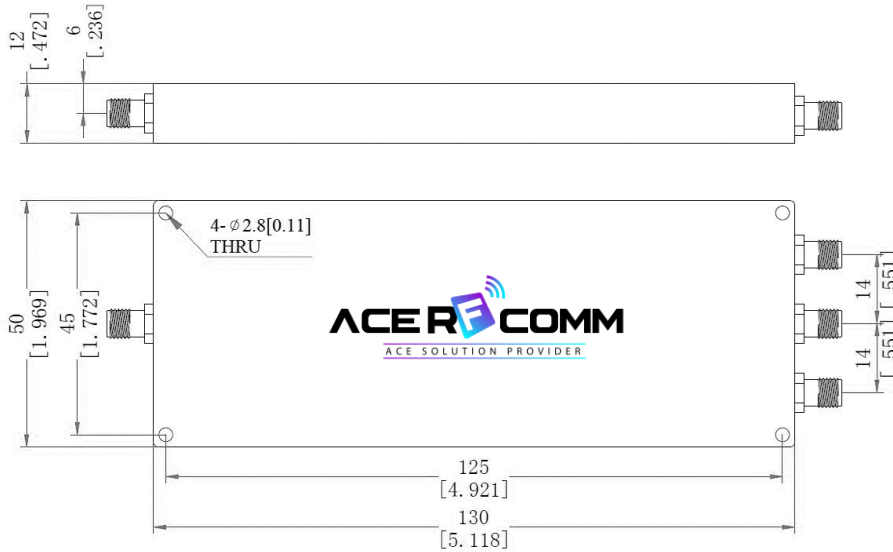

Electrical & Environmental specification

Frequency Range		0.5 ~ 6.0GHz
Impedance		50 Ohm
Insertion Loss		2.6dB Max (Excluding 4.8dB)
VSWR	Input	Typ 1.25:1, Max 1.40 : 1
	Output	Typ 1.20:1, Max 1.40 : 1
Amplitude Balance		± 0.8dB Max
Phase Balance		8 Degree Max
Isolation		Typ 25dB, Min 20dB
Power		20Watt @ 25°C
Connectors		SMA Female connector
Surface Finish		Black painting
Temperature		-30°C ~ 60 °C

Material specification

Connector Body	Gold Plating Brass
Connector Center Contacts (Female)	Gold Plating BeCu
Housing	Aluminum
Other Screw	Stainless Steel

Power Divider, 0.5~6GHz, SMA 3Way 20Watt

P.N. : P-M506.S320.1

Test Data

