


## Termination, DC~18GHz, N Male 5Watt

P.N. : T-0018.NM05.1

### Dimension

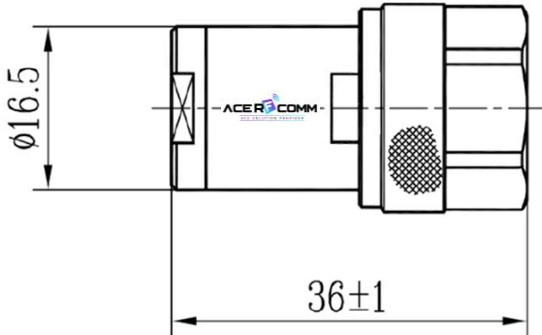

### Photo/3D Image



### Electrical & Environmental specification

|                       |   |
|-----------------------|---|
| Frequency Range       | DC ~ 18GHz                                  |
| Impedance             | 50 Ohm                                      |
| Input Ave Power       | 5Watt @ 25°C                                |
| Peak Power            | 0.25kW ( 5 μsec pulse width, 1% duty cycle) |
| V.S.W.R.              | 1.45 : 1 Max                                |
| Operating Temperature | -55°C ~ 125 °C                              |

### Material specification

|                                 |                         |
|---------------------------------|-------------------------|
| Connector Body                  | Tri-Alloy Plating Brass |
| Connector Center Contact (Male) | Gold Plating Brass      |
| Connector Mating                | 500 cycles              |
| Weight                          | 50gram                  |
| Dimension                       | Ø16.5 * 36mm            |
| RoHS                            | Complaint               |