


## Termination, DC~18GHz, SMA Male 2Watt

P.N. : T-0018.SM02.2

### Dimension

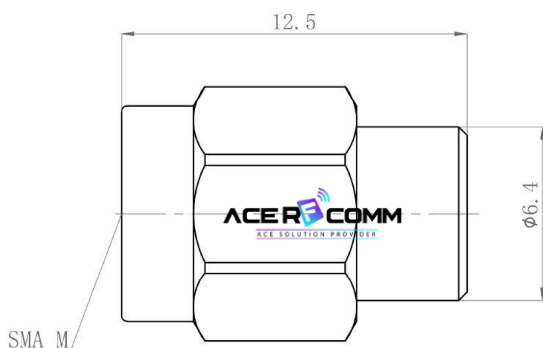

### Photo/3D Image



### Electrical & Environmental specification

Frequency Range	DC ~ 18GHz
Impedance	50 Ohm
Input Ave Power	2Watt @ 25°C ambient, derating linearly to 0.2W at 100°C
Peak Power	250W ( 5 μsec pulse width, 0.4% duty cycle)
V.S.W.R.	1.20 : 1 Max
Operating Temperature	-55°C ~ 100 °C

### Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact (Male)	Gold Plating Brass
Connector Mating	500 cycles
Dimension	Ø6 * 12.5mm
RoHS	Complaint

# Termination, DC~18GHz, SMA Male 2Watt

P.N. : T-0018.SM02.2

## Test Data

