


Termination, DC~18GHz, SMA Male 20Watt

P.N. : T-0018.SM20.1

Dimension

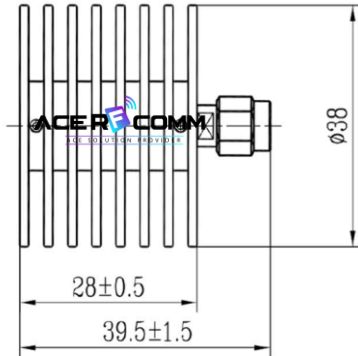

Photo/3D Image



Electrical & Environmental specification

Frequency Range	DC ~ 18GHz
Impedance	50 Ohm
Input Ave Power	20Watt @ 25°C
Peak Power	1.0kW (5 µsec pulse width, 1% duty cycle)
V.S.W.R.	1.45 : 1 Max
Operating Temperature	-55°C ~ 125 °C

Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact (Male)	Gold Plating Brass
Connector Mating	500 cycles
Housing	Aluminum
Weight	48gram
Dimension	Ø38 * 40mm
RoHS	Complaint

Termination, DC~18GHz, SMA Male 20Watt

P.N. : T-0018.SM20.1

Test Data



Trc1 — S33 SWR 100 mU/ Ref 1.3 U Cal Smo

1 ▾

