


## Termination, DC~18GHz, SMA Male 50Watt

P.N. : T-0018.SM50.1

### Dimension

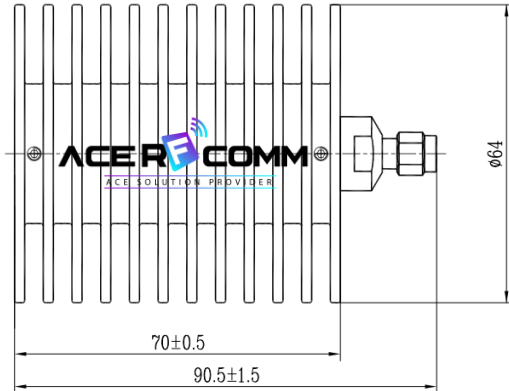

### Photo/3D Image



### Electrical & Environmental specification

Frequency Range	DC ~ 18GHz
Impedance	50 Ohm
Input Ave Power	50Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	2.5kW ( 5 µsec pulse width, 1% duty cycle)
V.S.W.R.	1.50 : 1 Max
Operating Temperature	-55°C ~ 125 °C

### Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact (Male)	Gold Plating Brass
Connector Mating	500 cycles
Housing	Aluminum
Weight	520gram
Dimension	Ø64 * 90.5mm
RoHS	Complaint

# Termination, DC~18GHz, SMA Male 50Watt

P.N. : T-0018.SM50.1

## Test Data



Trc1 — S33 SWR 100 mU/ Ref 1.3 U Cal Smo

1 ▾

