

Waveguide Crossguide Directional Coupler


WR28, 40dB 26.3~40GHz, 2.92mm Female coupling port

P.N. : W-CC28.2640.40

Photo



Dimension

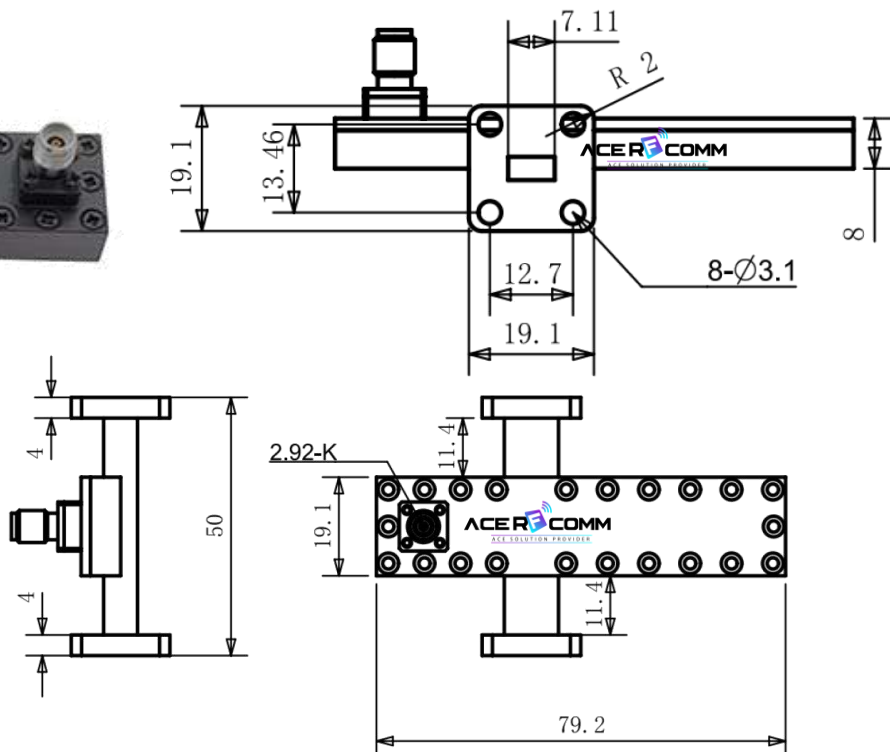

Electrical & Environmental specification

Frequency Range	26.3GHz ~ 40GHz
Impedance	50 Ohm
Coupling Value	40dB \pm 1.6 Typ.
Directivity	14dB Min.
V.S.W.R.	1.15 : 1 Max. (Main line) 1.30 : 1 Max. (Secondary line)
Operating Temperature	-40°C ~ 70 °C

Material specification

Waveguide size	WR28 (R320)
Flange Type	UBR320
Flange Material	Copper
Body Material and Plating	Copper, black painting
Coupling port	2.92mm Female

Waveguide Crossguide Directional Coupler WR28, 40dB 26.3~40GHz, 2.92mm Female coupling port

P.N. : W-CC28.2640.40

Test Data

