

Adaptor, 1.0mm Male to 1.0mm Male

P.N. : X-1010.H1MM.1

Dimension

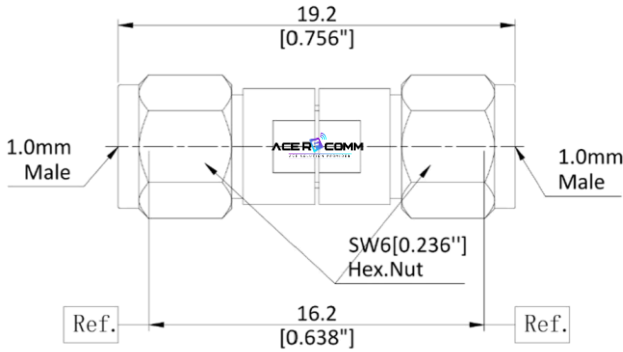


Photo / 3D Image



Electrical specification

Frequency Range	DC ~ 110GHz
Impedance	50 Ohm
V.S.W.R.	1.40 : 1 Max.

Material specification

Connector Body	Passivated Stainless Steel & BeCu
Connector Center Contact	Gold Plating BeCu
Insulator	Special Dielectric
Connector Mating	500 cycles

Environmental specification


RoHS	Compliant
Operating Temperature	-55°C ~ 85°C
Interface	IEC-61169

Adaptor, 1.0mm Male to 1.0mm Male


P.N. : X-1010.H1MM.1

Test Data


Tr1 S11 Refl SWR RefLvl: 1 U Res: 200 mU/Div

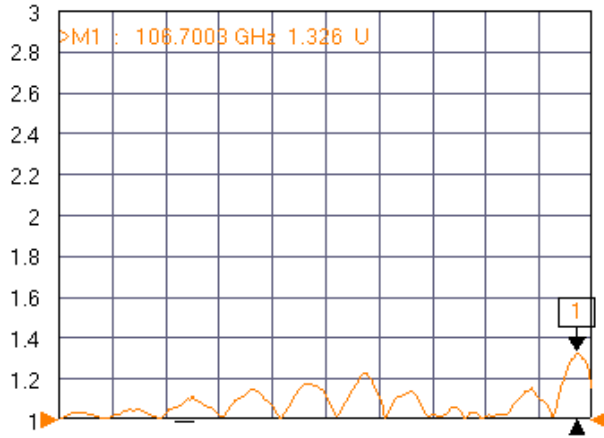

Tr2 S22 Refl SWR RefLvl: 1 U Res: 200 mU/Div

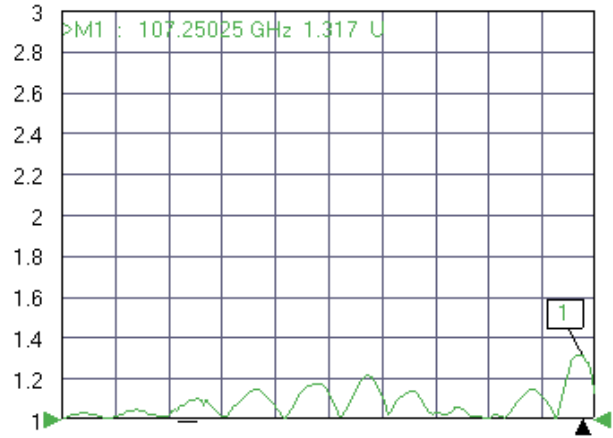

Tr3 S21 Trans LogM RefLvl: 0 dB Res: 5 dB/Div

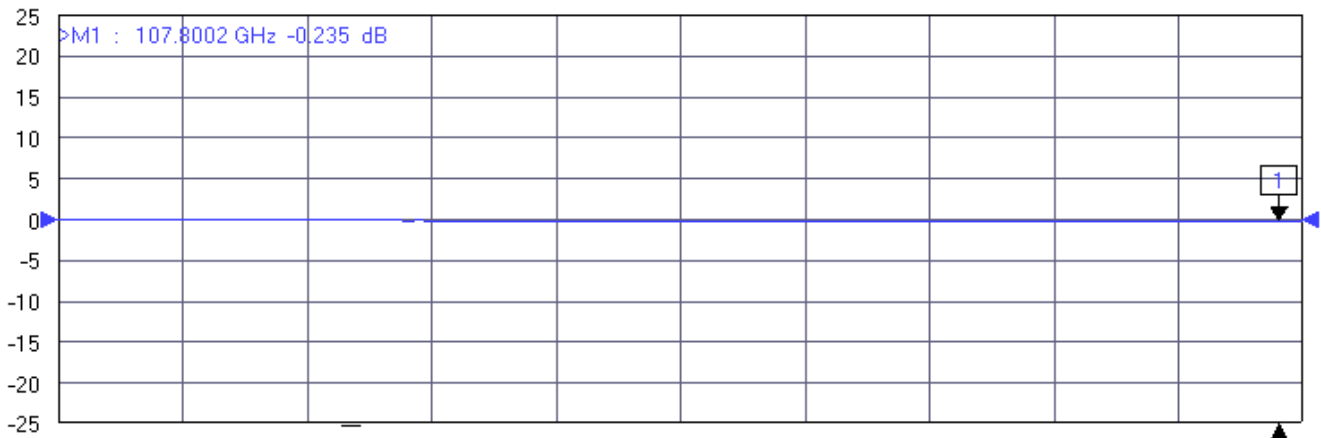

Ch1 TR Start 10 MHz Stop 110 GHz IFBW 100 Hz Avg OFF Measuring State **CORR**