

Adaptor, 2.4mm Female to 2.4mm Female

P.N. : X-2424.50FF.1

Dimension

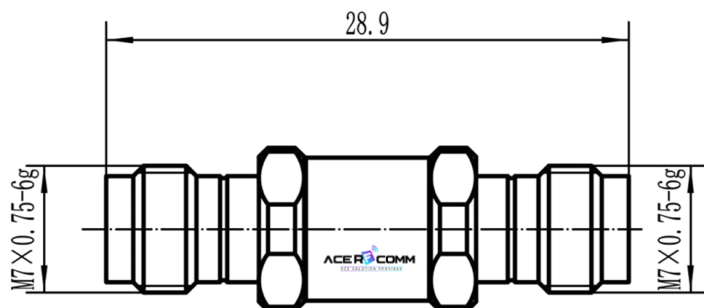


Photo / 3D Image



Electrical specification

Frequency Range	DC ~ 50GHz
Impedance	50 Ohm
V.S.W.R.	1.25 : 1 Max.

Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact	Gold Plating BeCu
Insulator	Special Dielectric
Connector Mating	500 cycles

Environmental specification

RoHS	Compliant
Operating Temperature	-55°C ~ 165°C
Interface	IEC-61169

Adaptor, 2.4mm Female to 2.4mm Female

P.N. : X-2424.50FF.1

Test Data

