


## Adaptor, 2.4mm Male to 2.4mm Male

P.N. : X-2424.50MM.1

### Dimension

### Photo / 3D Image

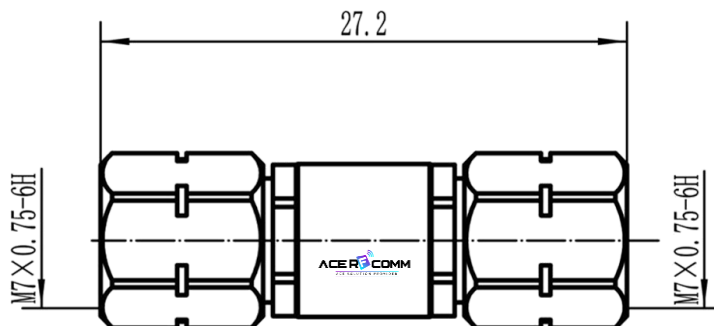

### Electrical specification

Frequency Range	DC ~ 50GHz
Impedance	50 Ohm
V.S.W.R.	1.25 : 1 Max.
Insertion Loss	0.40 dB Max.

### Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact	Gold Plating BeCu
Insulator	Special Dielectric
Connector Mating	500 cycles

### Environmental specification

RoHS	Compliant
Operating Temperature	-55°C ~ 165°C
Interface	IEC-61169

## Adaptor, 2.4mm Male to 2.4mm Male

P.N. : X-2424.50MM.1

### Test Data

