

Adaptor, 2.4mm Male to 2.4mm Male

P.N. : X-2424.50MM.P

Dimension

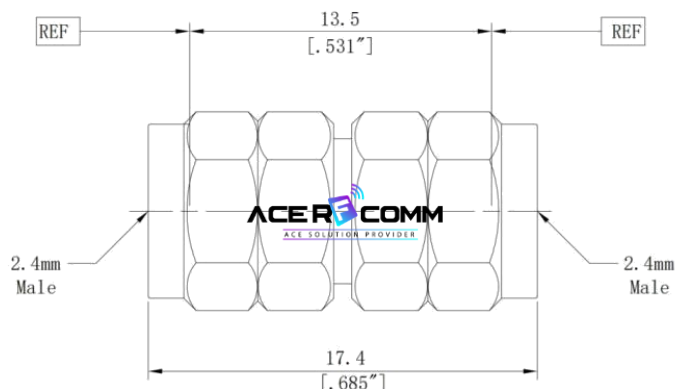


Photo / 3D Image



Electrical specification

Frequency Range	DC ~ 50GHz
Impedance	50 Ohm
V.S.W.R.	1.25 : 1 Max.

Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact	Gold Plating BeCu
Insulator	Special Dielectric
Connector Mating	500 cycles


Environmental specification

RoHS	Compliant
Operating Temperature	-55°C ~ 165°C
Interface	IEC-61169

Adaptor, 2.4mm Male to 2.4mm Male

P.N. : X-2424.50MM.P

Test Data

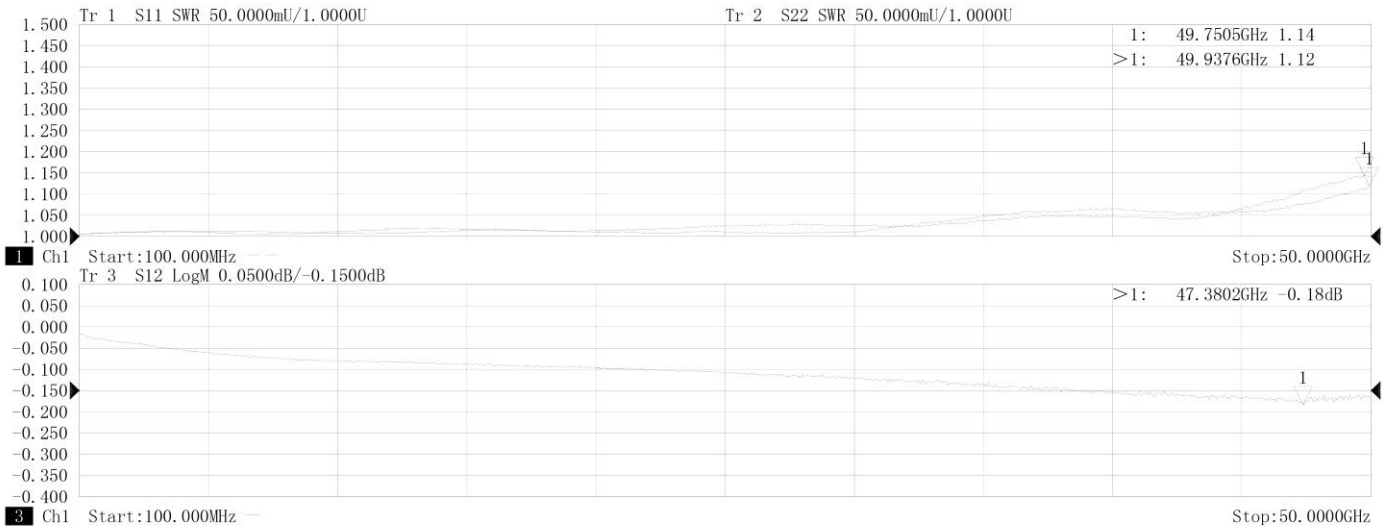

Ch1	SweepType	Start Frequency	Stop Frequency	Points	IF BW(Hz)	SweepTime(s)	Port1, 2Power (dBm)
Ch1	LIN_SWEEP	0.100000000GHz	50.000000000GHz	801	1000	0.789015	-5.0, -5.0