


## Adaptor, 2.92mm Female to 2.92mm Female

P.N. : X-2929.40FF.1

### Dimension

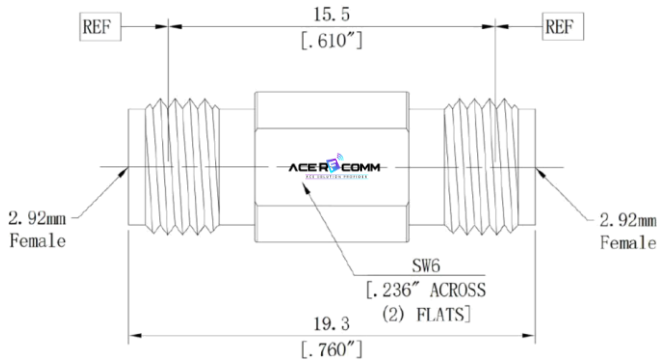

### Photo



### Electrical specification

Frequency Range	DC ~ 40GHz
Impedance	50 Ohm
V.S.W.R.	1.25 : 1 Max.
Insertion Loss	0.35dB Max.

### Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact	Gold Plating BeCu
Insulator	Special Dielectric
Connector Mating	500 cycles

### Environmental specification

Operating Temperature	-65°C ~ 165 °C
RoHS	Compliant
Interface	MIL-STD-348

# Adaptor, 2.92mm Female to 2.92mm Female

P.N. : X-2929.40FF.1

## Test Data

