


Low PIM, Adaptor, NEX10 Male to N Female

P.N. : X-NN10.06FM.1

Dimension

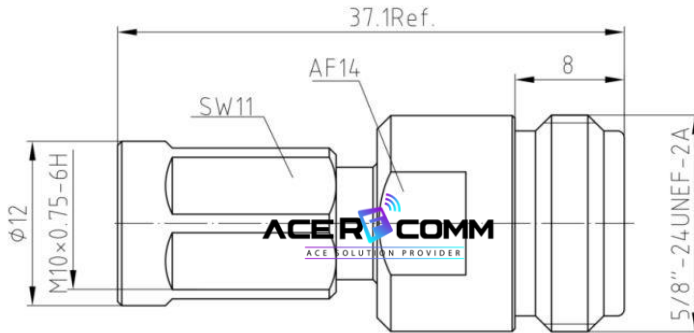

Photo



Electrical specification

Frequency Range	DC ~ 6GHz
Impedance	50 Ohm
V.S.W.R.	1.27 : 1
PIM	-160dBc Min with 2×20W tones

Material specification

Connector Body	Ternary Alloy Plated Brass
Connector Center Contact	Silver Plated BeCu
Insulator	PTFE
Connector Mating	500 cycles

Mechanical specification

Operating Temperature	-40°C ~ 125 °C
Weight	29 gram
RoHS	Compliant