


Adaptor, N Male to N Female, DC~18GHz

P.N. : X-NNNN.18MF.1

Dimension

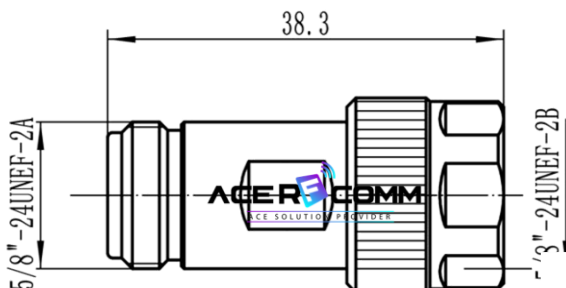

Photo



Electrical specification

| | |
|-----------------|---------------|
| Frequency Range | DC ~ 18GHz |
| Impedance | 50 Ohm |
| V.S.W.R. | 1.20 : 1 Max. |

Material specification

| | |
|--------------------------|----------------------------|
| Connector Body | Stainless Steel Passivated |
| Connector Center Contact | Gold Plating Becu |
| Insulator | PEI |
| Connector Mating | 500 cycles |

Environmental specification

| | |
|-----------------------|--------------------------------------|
| Corrosion resistance | MIL-STD-202, Method 101, Condition B |
| Moisture resistance | MIL-STD-202, Method 106 |
| Thermal shock | MIL-STD-202, Method 107, Condition B |
| Vibration | MIL-STD-202, Method 204, Condition D |
| Operating Temperature | -55°C ~ 155 °C |
| RoHS | Compliant |

Adaptor, N Male to N Female, DC~18GHz

P.N. : X-NNNN.18MF.1

Test Data

